外形设计变更,恕不另行通知
The shape design will be amended without prior notice


广东喜泰 罐包装专家

喜和泰来

广东喜泰包装设备有限公司
GUANGDONG XTIME PACKAGING EQUIPMENT CO.,LTD

Quality Orientation, Technological Innovation
Sinverity Sercive, Continuous Improvement





广东喜泰包装设备有限公司
GUANGDONG XTIME PACKAGING EQUIPMENT CO.,LTD
广州喜泰千恒智能设备有限公司
GUANGDONG XTIME FOREVER SAMRT EQUIPMENT CO.,LTD

地址：广东省广州市从化区城郊街荷村十七社工业园
Address:17-she Industrial Park Hecun, Chengjiao Street, Conghua District, Guangzhou China
电话（TEL）:400-072-0238（国内domestic）0086-139 2239 8939 （国际international）
传真（FAX）：0086-20-37981011
邮箱（E-mail）：1759196537@qq.com（国内domestic）xtime@gzxtime.com（国际international）
网址（Web）：www.gzxtime.com（中文网站）www.xtpackagingmachine.com（英文网站）



COMPANY PROFILE 公司概况

广东喜泰包装有限公司是一家专业生产及销售各种定量灌装、封口、贴标等系列包装设备的股份制企业，集研发、设计、生产、营销为一体，产品畅销全国及海外各地，主要用于食品、饮料、医药及化工等行业的产品包装。公司位于中国华南地区核心城市广州市，依托发达便利的城市交通，经过十几年的历练和成长，现已发展成为一家全国知名的包装机械生产企业，并建立了良口的市场口碑。公司一直非常注重现场管理、质量控制与服务跟进，通过生产与营销团队的不懈努力，公司业务已扩张至全球80多个国家，市场占有率呈逐年增长态势。

企业创办人及团队有着十多年的包装机械研发、生产和客户维护的经验，每一个产品都有成熟的技术，长期的经验沉淀，并经过严格的质检和测试标准。

我们的经营理念是“质量为本、技术创新、诚信服务、持续改进”，我们期待着与您合作！

Guangdong XTIME Packaging Equipment Co., Ltd. is a manufacturer specialized in production and sale of various can and bottle packaging system. We are integrated with research, design, production and sale as one .Our products are sold well all over the world mainly for the packages of food, beverage, medical and chemical industries etc. Our factory Located in Guangzhou City, a core city in the South China, with convenient transportation access. We've developed into a nationally-known packaging machinery manufacturer and earned good reputation based on the good technology and service. We've been paying close attention to management, quality control and after-sales services and through unrimiting efforts made by our production and marketing team, we have expanded our business to over 80 countries and the brand competitiveness is still increasing.

The founder and team possess nearly 10 years of experience in can seaming research & development, production and customer care. Each product is manufactured with mature technology and long-term experience and is approved by strict quality testing and test standard. Our operation principle is"Quality orientation, technological innovation, sincerity service, continuous improvement". Choose us is to choose high-quality products.

We are looking forward to cooperating with you and warmly welcome your calling!

扫码看视频
More Video Pls Scan

PRODUCTION WORKSHOP& PROFESSIONAL QC



▶ 配件加工区 (Parts processing area)

加工区工整有序，提高工作效率



▶ 机器质量检测 (Quality Inspection)

机器组装完整后，技术人员会进行通电调试，检查机器各零件的安全稳定性




▶ 机器调试区 (Accessory processing area)

机器送到客户手上之前，我们会进行调试，保证到达客户手上时运作正常，安装简易，省时

工艺流程



▶ 01.设计

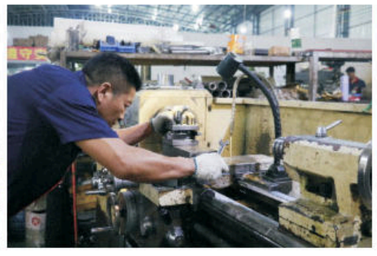

▶ 02.普通车床




▶ 03.数控车床



▶ 05.焊接



▶ 06.铣床

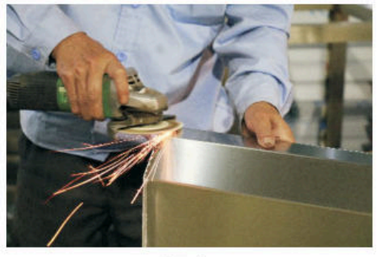

▶ 07.打磨



▶ 08.安装



▶ 09.调试



▶ 10.装箱打包

Xtime Machinery

国家级高新技术企业
包装机械研发中心









BUSINESS TEAM & BUSINESS SCOPE



















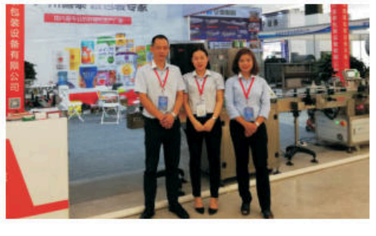

合作商家
COOPERATION ENTERPRISE

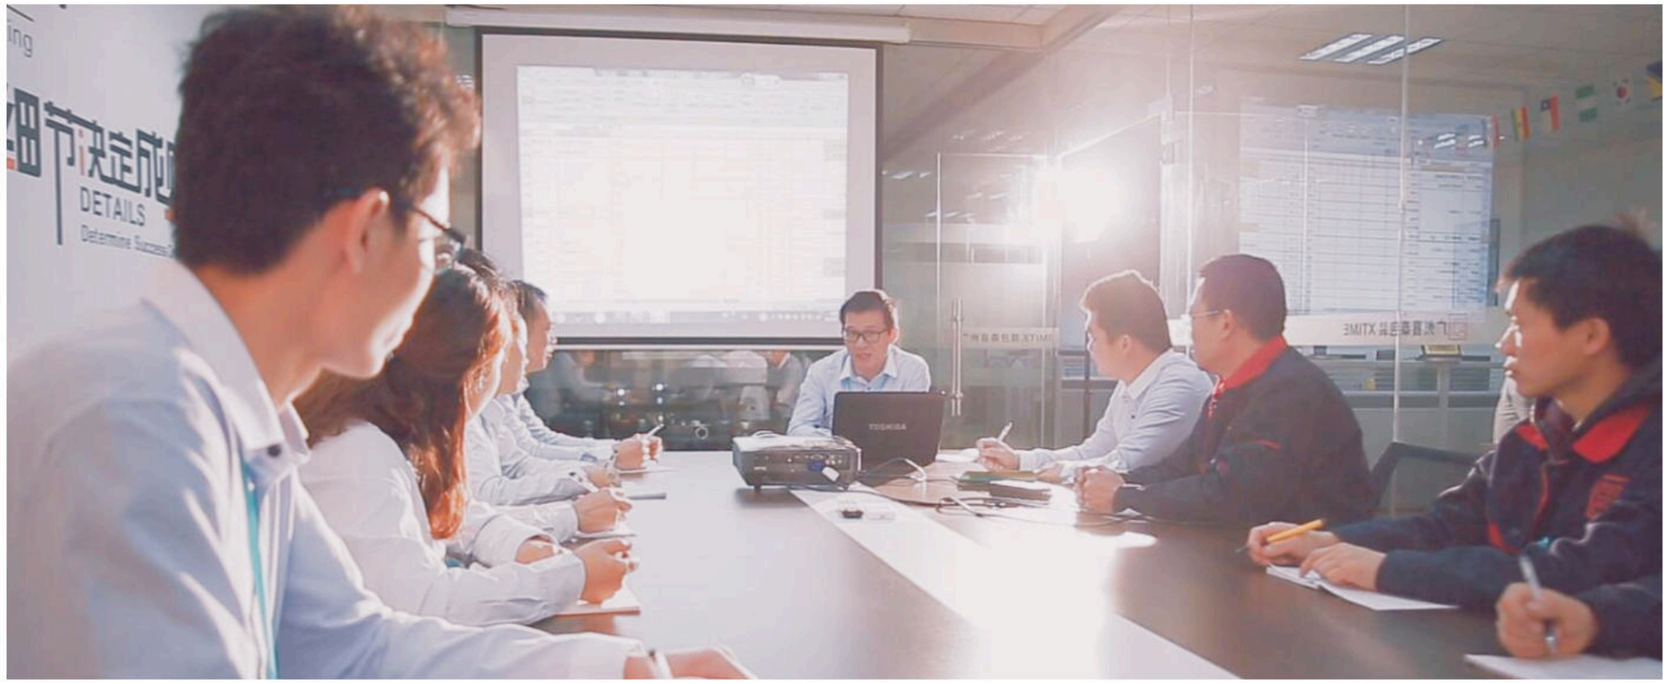

客户服务
CUSTOMER SERVICE

24 HOURS
全国服务热线：
400-072-0238

售前服务

1.随时为客户提供产品、价格、技术等方面的专业信息咨询。
2.为客户免费量身定做合适的包装生产线方案。
3.客户可随时亲临公司现场考察，公司提供专业的接待人员。


售中服务

1.诚信、公平服务每一位新老客户。
2.严格执行合同规定的各项条款，对客户订购每一台设备，我们都严格遵守标准、进行多重质量检验。

售后服务

1.广东喜泰包装负责对客户采购的设备进行免费安装、调试以及免费培训用户的技术人员，确保用户能熟练掌握设备操作方法，尽快投入使用，
2.广东喜泰包装对客户所购买的产品提供一年免费保修。

颗粒旋盖包装生产线标准配置
Particle capping packaging line standard configuration

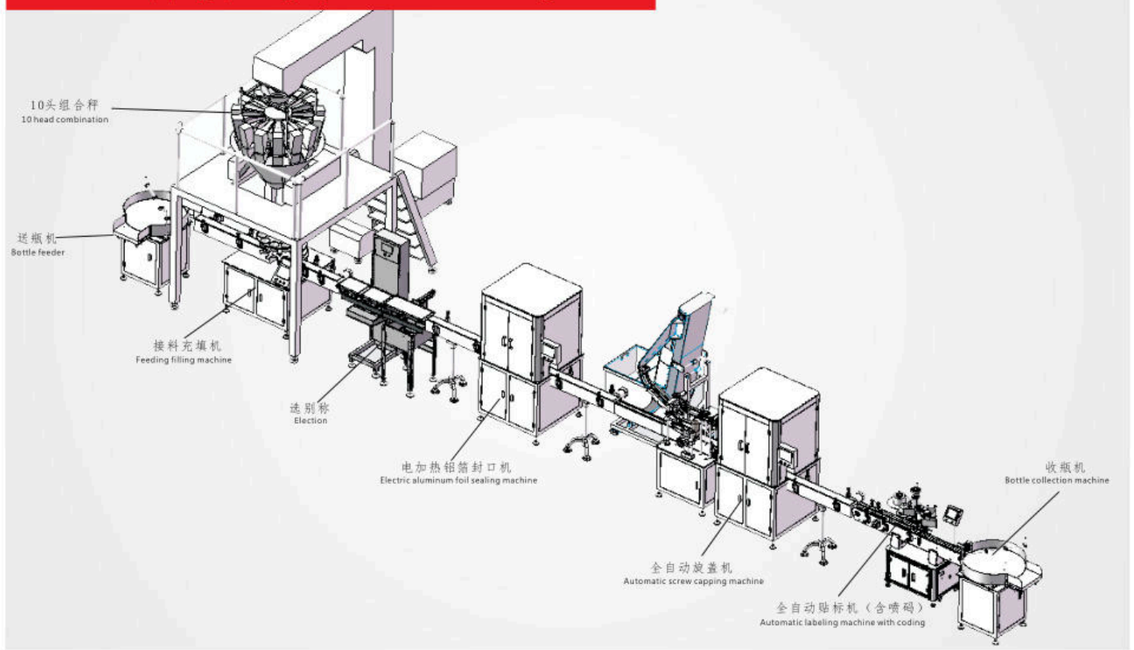

配套机组：

送瓶机+10头组合称+接料充填机+选别称+电加热铝箔封口机+全自动旋盖机+全自动贴标机
+喷码机+收瓶机

Bottle feeder+ 10 head combination+Feeding filling machine+Election+Electric aluminum foil sealing machine+Automatic screw capping machine+Automatic labeling machine
+Printer+Bottle collection machine

生产线特点：

★本生产线配套机器除注明材料外均为不锈钢；
★所有机器结构均是按照食品卫生标准选用设计的；
★与物料接触的容器内部均抛光处理；
★经常拆洗的结构都采用了易拆件连接，方便清洁卫生；
★包装线主要适用于各种颗粒状和固体物料的包装，如坚果、果脯、中药材等。





Tinned brief description:

★ All machines structures are designed according to food hygiene standards.
★ The inner wall of the machine in contact with the material is polished.
★ Frequently removed parts are connected by easy-to-detach and convenient cleaning.
★ Frequently removed parts are connected by easy-to-detach and convenient cleaning.
★The packaging line mainly suitable for all kinds of granular and solid materials, such as nuts, preserved fruits, Chinese herbal medicines, ets.

颗粒易拉罐包装生产线标准配置
Standard installation of granular can packaging line



配套机组：

送瓶机+10头组合称+接料充填机+全自动封罐机+全自动贴标机+压盖机+收瓶机

Bottle feeder+14 head combination+Feeding filling machine+Automatic sealing machine+Automatic labeling machine+Capping machine+Bottle collection machine

生产线特点：


★可根据需求选配不同配置的全自动设备进行组装；
★所有机器结构均是按照食品卫生标准选用设计；
★与物料接触的容器内壁均抛光处理；
★经常拆洗的结构都采用了易拆件连接，方便清洁卫生；
★包装线主要适用于各种颗粒状的固体物料包装，如坚果、果脯、中药材、锅巴、大米等。



Tinned brief description:

★Selective assembly of full-automatic equipment with different configuration based on varied demands.
★All machines structures are designed according to food hygiene standards.
★The inner wall of the machine in contact with the material is polished.
★Frequently removed parts are connected by easy-to-detach parts and convenient cleaning.
★The packaging line mainly suitable for all kinds of granular and solid materials,such as nuts, preserved fruits, Chinese herbal, medicines, etc.

颗粒灌装包装机+铝箔封口机
Granule filling packaging+Aluminum foil sealing machine

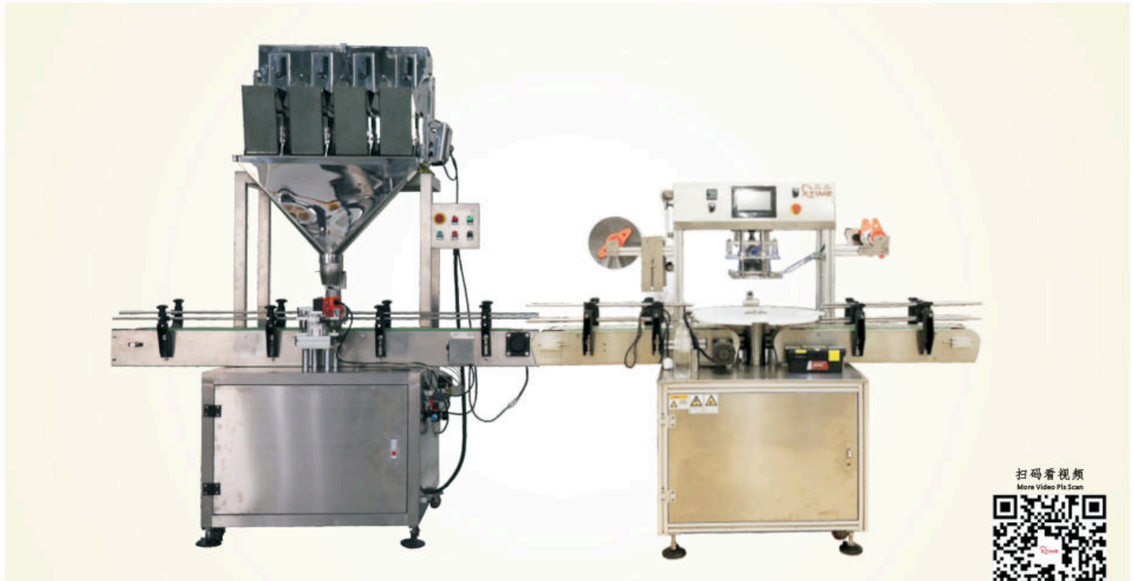

配套机组：

4头线性秤+铝箔封口机

4-heads linear weigher+Fully automatic turntable type electric heating aluminum foil sealing machine

生产线特点：

★适合白糖、盐、大米、豆类、种子、调味品、洗衣粉、饲料、干燥剂、塑料胶粒、五金等颗粒状定量称重包装；

★卷膜封口机，适用于PET塑料瓶、玻璃瓶、马口铁罐、铝罐操作简单易学，是食品、饮料和制药行业的理想包装设备。

★自动完成称重、灌装和封口功能，生产能力和自动化程度高，同时节约人工成本，适合作为包装生产线的设备。

Tinned brief description:

★This machine is applicable for sealing of various plastic cans,tin cans, aluminum cans,paper cans and all kinds of round cans. It is simple in operation and it is an ideal packing equipment of food, beverage, pharmaceutical and the other industry.

★aluminum foil sealing machine, suitable for PET plastic bottles, glass bottles, tin cans, aluminum cans It is simple in operation and it is an ideal packing equipment of food, beverage, pharmaceutical and the other industry.

★The packaging system inculdes weighing,canning and seaming function. The production capacity and automatic are very high,so the labor cost be saved.It is applicable to be part of for large packaging system.









全自动定量包装生产线
Fully-automatic quantitative packaging production line



配套机组：

量杯定量机+单口径全自动易拉罐封口机+全自动压盖机+全自动贴标机

Cup-volume weigher+Single-diameter fully-automatic can seaming machine +Automatic capping machine+Fully-automatic labeling machine

生产线特点：

★物料分装，封罐和贴标工作全部由机器自动完成；

★分装过程采用特殊设计，高出罐体的物料不会影响封罐工作；

★适合爆米花、大米、花生、开心果等颗粒状并以容积作为主要定量指标的分装包装。

Tinned brief description:


★Material canning, can seaming and labeling can be carried out by the production line.

★Special design is adopted for the canning process, thus the materials higher than the cans will not impact the can seaming.

★Be applicable for the canning of granular products which also use the volume as main quantitative index such as popcorn, rice, peanut and pistachio nut.



摇摇瓶代餐奶昔粉包装生产线标准配置
Shke bottle meal replacement milk powder packaging line standard configuration

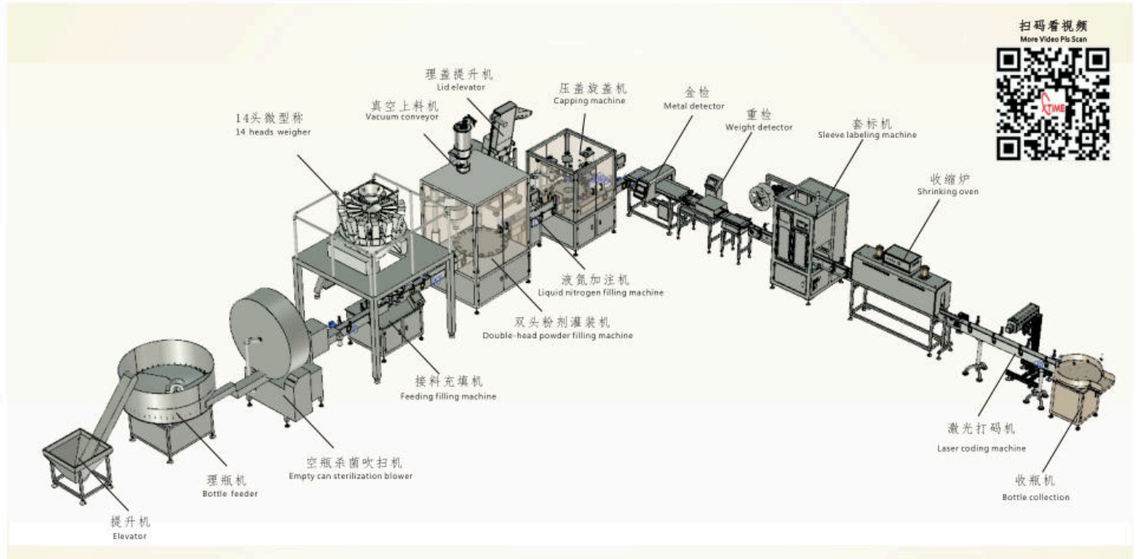

配套机组：

提升机+理瓶机+空瓶杀菌吹扫机+接料充填机+14头微型称+真空上料机+双头粉剂灌装机+液氮加注机+理盖提升机+压盖旋盖机+金检+重检+套标机+收缩炉+激光打码机+收瓶机

Elevator+Bottle feeder+Empty can sterilization blower+Feeding filling machine+14 heads weigher+Vacuum conveyor+Double-head powder filling machine+Liquid nitrogen filling machine+Lid elevator+Capping machine+Metal detector+Sleeve labeling machine+Shrinking oven+Laser coding machine+Bottle collection

生产线特点：

★自动完成理瓶、称重、分装、旋盖、套标和打码的工作；

★感应控制装置或模块采用国际或国内知名品牌，性能稳定可靠，故障率极低；

★适用于摇摇瓶代餐奶昔粉的生产线，生产线操作简单易学，是食品、饮料、制药等行业的理想设备。




Tinned brief description:

★Automatically complete the bottling,weighing,sorting,capping,labeling and coding.

★Adoption of internationally or domestically famous brands for the inductive control devices or modules with stable and reliable performance and fairly low failure rate.

★Suitable for the packaging of shake bottle meal replacement milk powder.The operation is easy to learn, thus it can be ideal devices for food,beverage and pharmaceutical industries.

奶粉生产线标准配置
Milk powder production line standard configuration

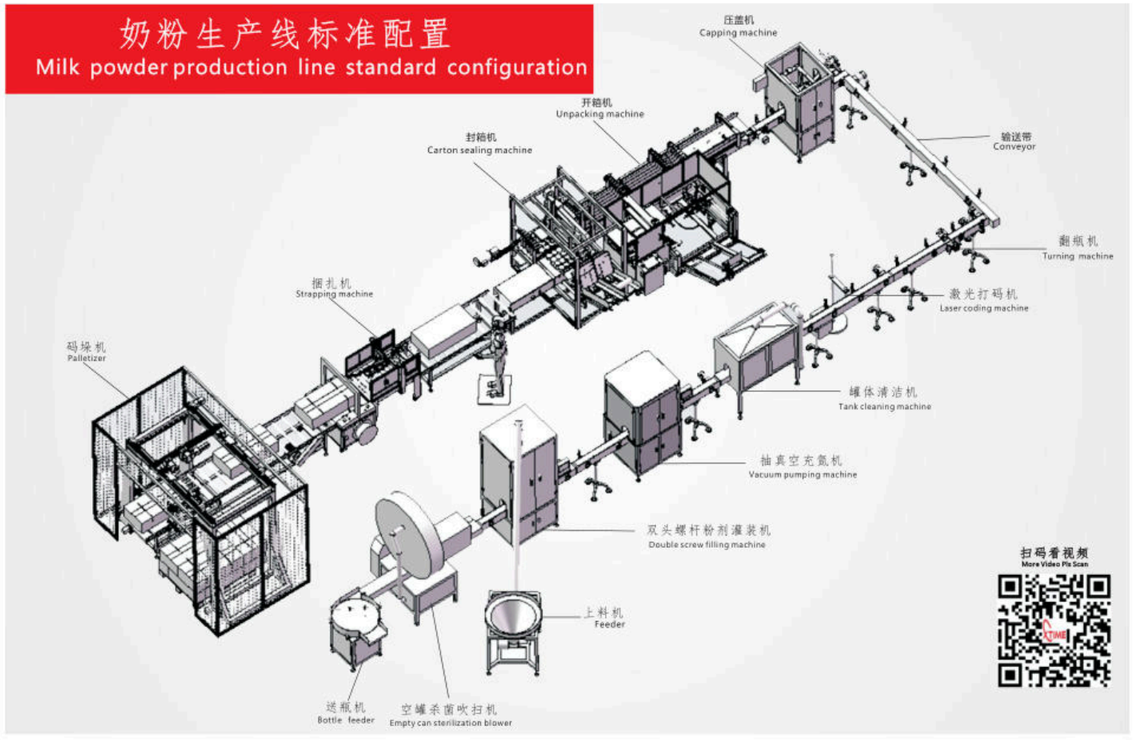

配套机组：

送瓶机+空罐杀菌吹扫机+双头螺杆灌装机+抽真空充氮封罐机+罐体清洁机+激光打码机+翻瓶机+压盖机+开箱机+装箱机+封箱机+捆扎机+码垛机

Bottle feeder+Empty can sterilization blower+Double screw filling machine+Vacuum nitrogen machine+Tank cleaning machine+Laser coding machine+Turning machine+Capping machine+Unpacking machine+packing machine+Carton sealing machine+Strapping machine+Palletizer

生产线特点：

★本生产线配套机器除注明材料外均为不锈钢；

★所有机器结构均是按照食品卫生标准选用设计；

★具有吸扬尘装置，不会污染环境和设备；

★双螺杆头充填，保证高精度灌装；

★包装线主要适用于各种粉剂物料的包装，如五谷杂粮粉、营养粉、奶粉、鸡精粉等。





Tinned brief description:

★All machines in this line are stainless steel except the materials indicated.

★All machines structures are designed according to food hygiene standards.

★With dust suction device, without environmental and equipment pollution.

★Filling double-screw head in order to ensure high-precision canning.

★It mainly suitable for the packaging of various powder materials, such as whole grains powder, nutritional powder, milk powder, chicken powder and so on.

粉剂上料充填包装机+旋盖贴标机
Powder lifting and filling packaging machine+capping labling machine



配套机组：

空瓶杀菌吹扫机+单头粉剂灌装机+理盖提升机+压盖旋盖机+全自动贴标机
Empty can sterilization blower+Single-head powder filling machine+Lid elevator+Capping machine +Automatic labeling machine

生产线特点：

★自动完成粉料上料、定量分装、旋盖和贴标喷码等生产包装工序；
★料仓水平式开启，无需工具清洗即可拆开清洗；
★伺服电动驱动螺杆，物料接触部分全部为不锈钢；
★变换螺杆可计量不同重量和精度，适合多种粉状物料；
★设计合理精密,按速度要求设计制作单头、双头或多头旋盖，适应不同企业需求；采用上盖和旋盖组合，性能稳定可靠，实现无人值守生产自动化。

Tinned brief description:

★Automatically complete the production packaging processes including powder loading, quantitative sub-packaging,capping and labeling.
★The stock bin can be opened flatly and is easy to disassemble for clearing without any tools.
★The screw is driven by the servo motor and the parts which materials may contact are made of stainless steels.
★Different weights and accuracy can be weighed by changing screw, so it is applicable for various powdery materials.
★The design is reasonable and precise, and it can be designed intosingle-head, double-head or multi-head screw cap according to the speed requirement, whichcan meet the needs of different enterprises.It adopts the combination of the upper cover and rotarycover, with stable and reliable performance, which realizes the automatic production.









双头粉剂上料充填包装机+易拉罐封口机
Double head Powder lifting and filling packaging machine+can seaming machine



生产线特点：

★自动完成粉料上料、定量分装、封口和贴标喷码等生产包装工序；
★料仓水平式开启，无需工具清洗即可拆开清洗；
★伺服电动驱动螺杆，物料接触部分全部为不锈钢；
★变换螺杆可计量不同重量和精度，适合多种粉状物料；
★适用于各种塑料易拉罐、马口铁罐、铝罐、纸罐等各种圆形规格易拉罐的封口，操作简单易学，是食品、饮料和制药行业的理想包装设备。

Tinned brief description:

★Automatically complete the production packaging processes including powder loading, quantitative sub-packaging,sealing and labeling.
★The stock bin can be opened flatly and is easy to disassemble for clearing without any tools.
★The screw is driven by the servo motor and the parts which materials may contact are made of stainless steels.
★Different weights and accuracy can be weighed by changing screw, so it is applicable for various powdery materials.
★This machine is applicable for sealing of various plastic cans,tin cans, aluminum cans,paper cans and all kinds of round cans. It is simple in operation and it is an ideal packing equipment of food, beverage, pharmaceutical and the other industry.











CS 130 全自动空罐吹扫杀菌机
Ultraviolet sterilizing and blowing machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★ 主材采用304不锈钢和进口有机玻璃，外形美观高档；
★ 独特设计，充分利用立体空间，节约企业资源；
★ 实现紫外线杀菌和空罐罐内清洁二合为一，满足企业高标准生产质量；
★ 采用国际知名品牌电器零配件供应商；
★ 造作简单方便，实现流水式全自动作业。

Structure and performance specification:
★The main material is the 304 stainless steel and imported plexiglass, beautiful and upscale in appearance.
★It makes full use of the three-dimensional space so that unique design saves the company's resources.
★The realization of integration of the UV sterilization and cleaning in the empty can meets the high standards of the company on production quality.
★Adopting the electrical accessories with the international well-konwn brand.
★Simple and convenient operation, achieving the automatic streamlined operation.

技术参数(Technical parameters)：

清洁速度Cleaning speed <45罐/分钟（502号奶粉罐，改变夹具可实现多种瓶罐子的清洁杀菌）变频调速	Up to 45 cans/minute(NO.502 milk cans, changing the fixture can achieve cleaning and sterilization of variety of bottles) Frequency control.
适用容器规格 Applicable container specification	76-130mm high 80-200mm
功率Power	1.1Kw(including vacuum,hair dryer) BLB:25Wx7/pcs
重量 Weight	200kg
尺寸 Size	L2500*W1510*H2435mm
电压 Voltage	Triphase 380V 50-60Hz

QJ 130 全自动罐体清洁机
Automatic bottlenect cleaning machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★ 增加等离子风机，除静电清扫罐体更彻底；
★ 结构紧凑，占地面积小。

Structure and performance specification:
★Adding plasma fan, removing the electrostatic cleaning can more thoroughly.
★With compact structure, small floor space.

技术参数(Technical parameters)：

材质 Material	304 stainless steel
清洁速度Cleaning speed 1-45罐/分钟（变频调速）	1-45 cans/minute (frequency control)
适用容器规格 Applicable container specification	60-150mm high 80-200mm
减速机功率 Reducer power	2Kw
重量 Weight	350kg
尺寸 Size	L2600*W600*H1600mm
电源 Power supply	Three-phase 380V 50-60Hz

YG 130 全自动压盖机(扣盖机)
Automatic capping machine(covered machine)







扫码看视频
More Video Pls Scan

结构及性能描述：
★ 外观主体采用不锈钢材料制作，外形简洁美观，符合大多数标准生产车间设计要求；
★ 各零部件加工精密，生产技术和工艺等经过本公司长时间客户经验的沉淀和不断改良，重点部位采用独特设计，强度高，噪音低，封口性能好；
★ 全自动生产线设计，极易与灌装系统，称重充填系统或贴标系统组成流水作业生产线；
★ 适用于各种马口铁罐、铝罐、纸罐等各种圆形规格易拉罐的封口，操作简单易学，是食品、饮料和制药行业的理想包装设备。

Structure and performance specification:
★The appearance of production is made stainless steel material,it's external shape is simple and beautiful in line with design requirement of lots of the standard production workshop .
★Various accessories are processed precision, production technology and industry, etc. Have obtained the sediment from customer experience for a long of the company and continuous improvement, it's main parts adopts the unique design, high strength, low noise, good sealing performance.
★The design of automatic production line is extremely easy to be make up the operation line combined with the filling system, weighing filling system or labeling system.
★This machine is applicable for sealing of various tin cans, aluminum cans,paper cans and all kinds of round cans. It is simple in operation and it is an ideal packing equipment of food, beverage, pharmaceutical and the other industry.

技术参数(Technical parameters)：

压盖速度 cover speed	30-50 cans/min
压盖高度 cover height	60-200mm
适用瓶型直径 Applicable bottle diameter	35-130mm
电源 Power supply	AC220V 50/60Hz
尺寸 Size	L2000*W1000*H1800mm
功率 Power	0.4Kw
重量 Weight	150kg
气源气压 Air source	0.4-0.8MPa

XT-100 给勺机
Spoon feeding machine







扫码看视频
More Video Pls Scan


结构及性能描述：
★ 采用振动盘理勺，勺子自动排序，传感器检测，可实现无罐、无勺自动停机。理勺速度快、能耗小、结构简单，符合国家GMP标准，采用SUS304不锈钢制造；
★ 本机为粉体罐装生产线的配套设备，用于自动给勺作业。

Structure and performance specification:
★Adopt vibration plate to handle spoon, spoon automatic sorting, sensor detection, can achieve no can, no spoon automatic shutdown. The utility model has the advantages of fast speed, small energy consumption and simple structure. Meet the national GPM standards, using SUS304 stainless steel manufacturing.
★The machine is a complete set of equipment for powder canning production line, used for automatic spoon feeding operation.

技术参数(Technical parameters)：

给勺速度 Dropping speed	40-60只/分钟
功率 Power	0. 37Kw
尺寸 Size	L1500*W700*H1500mm
电源 Power supply	3P AC208-415V 50/60Hz

液体灌装旋盖自动包装线
Fully-automatic liquid filling and capping production line

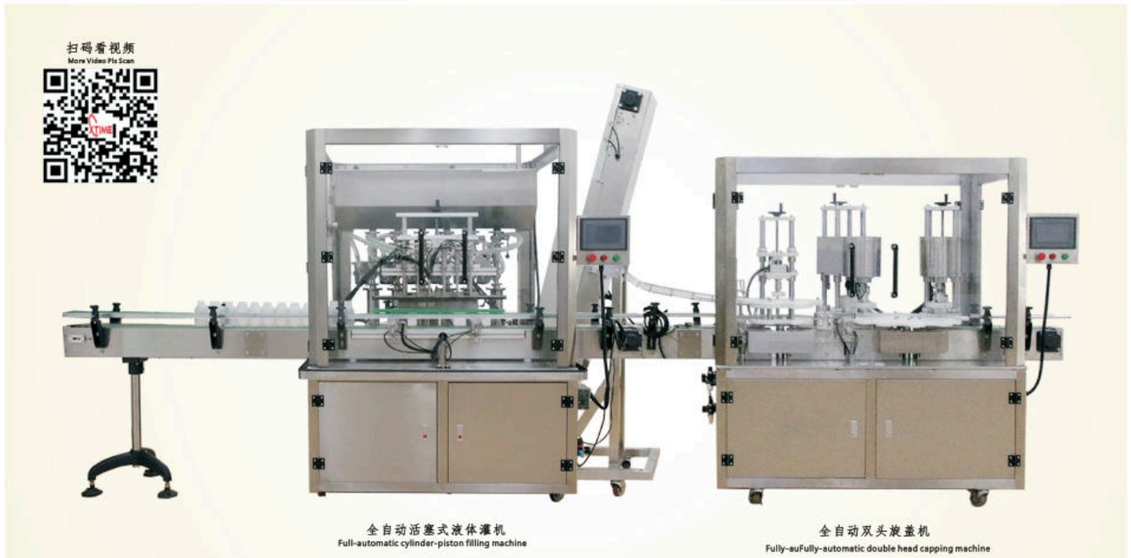

生产线特点：

★自动完成液体定量灌装和旋盖，生产自动化高，可作为大型包装生产线配套设备；
★液体灌装根据液体特性可设计为不同灌装原理的灌装机，安装工艺精良，各加工精度极高，性能稳定且故障率低；
★整机采用国际知名品牌电器配件，主要材料使用304不锈钢，包装精度高，性能稳定可靠；
★满足不同需求，可根据速度或实际需求进行定制灌装头数；
★适用于各种饮料、油类、酱料、酒水等液体类物料的灌装包装生产。

Tinned brief description:


★The production line includes liquid filling and capping. The automatic is high,They can be adopted for the part of packaging system.
★ The filling machine can be designed to many kinds of filling machine with different principle according to liquid character. The frabrication technology is very sophisticated and the processing is very accuracy.
★The components from international famous brands are adopted for the whole machine which is made of 304 stainless steel with high packaging accuracy and reliable performance.
★You can customize the machine to meet your different need. The machine can be designed to different quantity of cup-volume.
★The packaging line is suitable for the packaging of beverage,oil,soy sauce, wine etc.


自流式液体灌机
Automatic 6 nozzles gravity type liquid filling machine






酱类包装生产线标准配置
Sauce packaging production line standard configuration

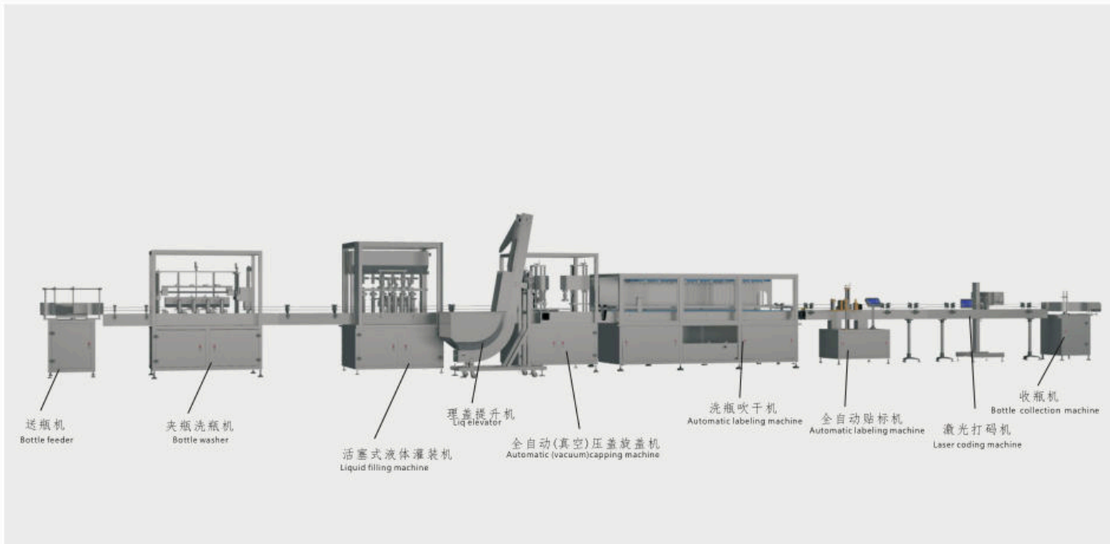

生产线特点：

★本生产线配套机器除注明材料外均为不锈钢；
★所有机器结构均是按照食品卫生标准选用设计的；
★与物料接触的容器内部均抛光处理；
★经常拆洗的结构都采用了易拆件连接，方便清洁卫生；
★包装线主要适用于各种酱类灌装。

Tinned brief description:

★ All machines in this line are stainless steel except the materials indicated.
★ All machines structures are designed according to food hygiene standards.
★ The inner wall of the machine in contact with the material is polished.
★ Frequently removed parts are connected by easy-to-detach and convenient cleaning.
★The packaging line mainly suitable for all kinds of sauce filling.



智能极速灌装机
Intelligent speed filling machine








FCT50-30 直线式双头螺杆粉剂定量充填机

Linear double-head screw with quantitative powder filling machine

扫码看视频
More Video Pls Scan



结构及性能描述：

★双螺杆头充填,保证高精度灌装；

★伺服电机及气动配合,进行螺杆计量控制,拖罐、走罐,高精度计量和定位；

★PLC和触屏控制配合，操作简单方便，只能化程度高；

★具有吹扬尘装置，不会污染环境和设备；

★功能强大，具有检重和超差剔除功能；

★更换罐型简单方便，易于操作。

Structure and performance specification:

★Filling double-screw head in order to ensure high-precision canning.

★The cooperation between servo motor and pneumatic to control the screw metering,support cans,move cans,realize high-precision mesurement and positioning.

★PLC and touch-screen control cooperate with simple operation and high-degree intelligence.

★With dust suction device, without environmental and equipment pollution.

★It's powerful and has the function of check weighing and out of tolerance rejection function.

★It's easy,simple and convenient to replace the can.

技术参数（Technical parameters）：	
适用范围 Applicable scope	diameter 40-130mm,height 60-200mm
生产效率 Production efficiency	30-40cans/min
气源 Air sourse	0.6-0.8MPa
功率 Power	5kw
重量 Weight	1000KG
尺寸 Size	L2100 *W1000*H2400mm
电压 Voltage	380V 50Hz






HS1000 全自动伺服活塞灌装机

Automatic heads servo piston filling machine

扫码看视频
More Video Pls Scan

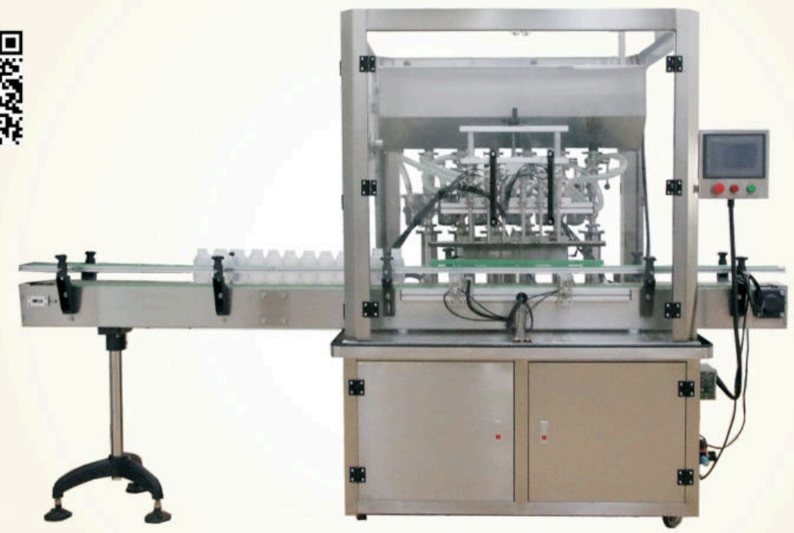

结构及性能描述：

★适用于各种液体、膏体、酱料的灌装，蜂蜜、辣椒酱、番茄酱、珍珠奶茶、橙汁等，通用性强；

★机架、机脚、护栏材料：304不锈钢；

★灌装嘴等与物料接触部位材料：316不锈钢、POM

★外露零件材料：不锈钢，阳极氧化处理铝合金，经电镀处理45钢，塑料件

Structure and performance specification:

★Suitable for filling liquid, paste, sauces, honey, chilli sauce tomato sauce,pear milk tea,orange juice,ect.

★Frame,foot,guardrail material:304 stainless steel.

★Material of filling mouth and other parts which contace with materials:316 stainless steel,POM

★External pares materials:stainless steel,anodized aluminum alloy,electroplated 45# steel,plastic parts.

技术参数（Technical parameters）：	
灌装头数量 Number of filling heads	6
灌装容量 Filling capacity	50ml-500ml
灌装形式 Irrigation from	伺服活塞多头灌装
灌装速度 Filling speed	24-32瓶/分钟（500ml/瓶）
灌装精度 Filling accuracy	±1%
储料桶 Bucket capacity	容量150L
功率 Power	2. 5kw, AC220V, 50/60Hz, 单相
气压 Air source supply	0. 6-0. 8Mpa





FG130E

中速全自动封罐机
Medium speed automatic can seamer machine







扫码看视频
More Video Pls Scan

技术参数（Technical parameters）：	
封罐速度 Sealing speed	30-40cans/min
封罐高度 Sealing height	40-200mm
适用瓶型直径 Applicable can shape and diameter	45-130mm
气源 Air sourse	0.6-0.8MPa
功率 Power	1.3kw
重量 Weight	500KG
尺寸 Size	L3000 *W900*H1800mm (including 3m conveyor belt)
电压 Voltage	Single phase 220V 50Hz/60Hz

FG130G

高速全自动封罐机
High speed automatic can seamer machine







扫码看视频
More Video Pls Scan

技术参数（Technical parameters）：	
封罐速度 Sealing speed	40-60cans/min
封罐高度 Sealing height	40-200mm
适用瓶型直径 Applicable can shape and diameter	45-130mm
气源 Air sourse	0.6-0.8MPa
功率 Power	1.3kw
重量 Weight	500KG
尺寸 Size	L3000 *W900*H1800mm (including 3m conveyor belt)
电压 Voltage	380V 50Hz

TB130CM-2

全自动步进(伺服)电机封罐机
Automatic step (servo) can sealing machine








扫码看视频
More Video Pls Scan

技术参数（Technical parameters）：	
封罐速度 Sealing speed	40 cans/min
封罐高度 Sealing height	60-220mm
适用瓶型直径 Applicable can shape and diameter	40-130mm
气源 Air sourse	0.6MPa
功率 Power	1.3kw
重量 Weight	400KG
尺寸 Size	L2000 *W900*H1350mm (including 2m conveyor belt)
电压 Voltage	220V

FG130L

全自动抽真空充氮封罐机
Automatic vacuum nitrogen seaming machine

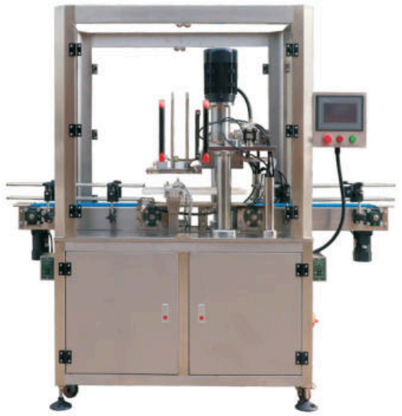

结构及性能描述：

★外观独特美观，采用全不锈钢和进口有机玻璃材料；
★结构设计合理，能完成抽真空和充氮独立及组合功能；
★实现高标准包装工艺要求，满足企业生产和国家检验标准；
★采用触摸屏及PLC人机智能交互系统，实现全自动化生产；
★采用独特下盖装置设计，实现塑料罐、纸罐和铁罐等所有罐种的抽真空充氮功能。

Structure and performance specification:

★The appearance of product is unique and beautiful, it's made of stainless steel and imported plexiglass materials.
★Reasonable structure design can deal with the function the vacuum and nitrogen filled independence and combination.
★Realizing the requirements of high standard packaging process, and meeting the production of enterprises and national inspection standards.
★Adopting the touch screen and PLC human-computer interaction system to realize the full automatic production.
★Adopting the unique device of lower cover to realize the function of vacuum nitrogen of all kinds of cans, such as plastic cans, paper cans and iron cans.





扫码看视频
More Video Pls Scan

技术参数（Technical parameters）：	
适用范围 Applicable scope	Diameter 99-127mm, height 100-180mm
生产效率 Production efficiency	5-7 cans/min when vacuum degree reaches -90Kpa
氮气气压 nitrogen pressure	0.1-0.8Mpa
气源 Air sourse	0.6-0.8MPa
功率 Power	3kw
重量 Weight	880KG
尺寸 Size	L1900 *W800*H1800mm
电压 Voltage	AC 220V
残氧量 Oxygen residues	≤3%

FG130Z

全自动真空封罐机
Automatic vacuum can sealing machine







扫码看视频
More Video Pls Scan

结构及性能描述：

★采用4把滚刀封口，封口受力更均匀，封口性能指标能达到国际标准；
★采用智能程序设计加触摸屏控制，使用和设置方便简单；
★滚轮为台湾进口滚轮，材料为SKD31日本模具钢，采用正反面设计，寿命超过500万次封口；

Structure and performance specification:

★ Adopt 4 rollers sealing, sealing force is more uniform, sealing performance index can reach the international standard.
★ Intelligent programming and touch screen control, easy to use and set up.
★ The roller is imported from Taiwan, the material is SKD31 Japanese die steel, with positive and negative design, and the sealing life is more than 5 million times.

技术参数（Technical parameters）：	
封罐速度 Sealing speed	40 cans/min
封罐高度 Sealing height	35-200mm
适用瓶型直径 Applicable can shape and diameter	50-100mm
功率 Power	9kw
重量 Weight	600KG
尺寸 Size	L2000 *W950*H1700mm (including 2m conveyor belt)
电压 Voltage	220V

XT-XGJ100D 全自动双头伺服旋盖机
Automatic double-head servo capping machine







扫码看视频
More Video Pls Scan

结构及性能描述：

★本机适用于塑料瓶和玻璃瓶等的旋盖密封包装；

★全304不锈钢材料，采用国际知名品牌电气零配件供应商；

★设计合理精密，按速度要求设计制作单头、双头或多头旋盖，适应不同企业需求；采用上盖和旋盖组合，性能稳定可靠，实现无人值守生产自动化；

★生产能力和自动化程度高，节约人工成本。

Structure and performance specification:

★The machine is suitable for sealing packag of rotaty covers of plastic bottles,glass bottles,etc

★All 304 stainless steel material adopts the electrical accessories with the international well-known brand


★The design is reasonable and precise, and it can be designed intosingle-head, double-head or multi-head screw cap according to the speed requirement, which can meet the needs of different enterprises.It adopts the combination of the upper cover and rotary cover, with stable and reliable performance, which realizes the automatic production.

★The production capacity and automatic are very high. So the labor cost can be saved.

技术参数（Technical parameters）：

旋盖速度 Speed of rotating the cap	30-40 bottles/min
电源 Power supply	AC220V 50/60Hz
重量 Weight	500kg
旋盖直径 Capping diameter	30-130mm
旋盖高度 Capping height	80-350mm
尺寸 Size	L3500*W1700*H2200（mm）

XT-XGJ100D 全自动双头抽真空旋盖机
Automatic double-head vacuum capping machine

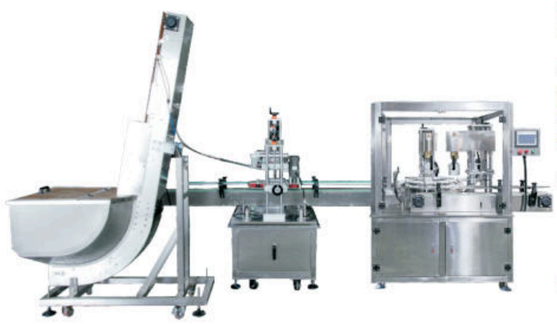





扫码看视频
More Video Pls Scan

结构及性能描述：

★本机适用于玻璃瓶旋盖密封真空包装；

★全304不锈钢材料，采用国际知名品牌电气零配件供应商；

★设计合理精密，按速度要求设计制作单头、双头或多头旋盖，适应不同企业需求；采用上盖和旋盖组合，性能稳定可靠，实现无人值守生产自动化；

★生产能力和自动化程度高，节约人工成本。

Structure and performance specification:

★This machine is suitable for glass bottle cap sealing vacuum packaging.

★All 304 stainless steel material adopts the electrical accessories with the international well-known brand.

★The design is reasonable and precise, and it can be designed intosingle-head, double-head or multi-head screw cap according to the speed requirement, which can meet the needs of different enterprises.It adopts the combination of the upper cover and rotary cover, with stable and reliable performance, which realizes the automatic production.

★The production capacity and automatic are very high. So the labor cost can be saved.

技术参数（Technical parameters）：

旋盖速度 Speed of rotating the cap	30-35 bottles/min
电源 Power supply	AC220V 50/60Hz
重量 Weight	650kg
旋盖直径 Capping diameter	60-80mm
尺寸 Size	L4500*W1800*H235（mm）

XT-XGJ100D 全自动 8 轮旋盖机
Automatic 8 wheels screw capping machine







扫码看视频
More Video Pls Scan

结构及性能描述：

★ 该机集自动理盖、上盖、自动旋盖于一体，生产速度快，效率高，运行稳定可靠；

★ 采用先进的传感元件，确保无瓶不送盖，卡瓶、缺盖自动停机报警等功能，从而保证了自动上盖的可靠性；

★ 更换不同给个的瓶子、盖子只需要简单调整，操作方便；

★ 采用世界知名品牌电器和气动元件，故障率低，性能稳定可靠，使用寿命长；

★本机适用于食品、制药、日化、农药、化妆品等行业。

Structure and performance specification:

★This machine combines self-motion setting cap, putting cap and screw cap to one with fast speed, high efficiency to steadily and reliably operate.

★Use advanced sensing element to ensure stop sending cap in case of no bottle, automatic stopping machine and alarming when cap getting stuck and lack of cap so as to ensure the reliability of automatic putting cap.

★Changing bottles and caps of different specification is just easy regulation and convenient operation.

★Use the world famous brand electric appliances and pneumatic elements with low failure rate, steady and reliable performance and long service life.

★This machine can be suitable for food, pharmacy, daily use chemical, pesticide cosmetic and other industries.

技术参数(Technical parameters)：

生产能力 Production capacity	50-80 bottles/min
功率 Power	0.27Kw 220V 50Hz
尺寸 Size	L1500*W650*H1400mm
重量 Weight	210kg

XG80-DJ 全自动对夹式旋盖机
Fully automatic pair clamp type cover revolve machine







扫码看视频
More Video Pls Scan

结构及性能描述：

★ 该机集自动理盖、上盖、自动旋盖于一体，生产速度快，效率高，运行稳定可靠；

★ 采用先进的传感元件，确保无瓶不送盖，卡瓶、缺盖自动停机报警等功能，从而保证了自动上盖的可靠性；

★ 采用世界知名品牌电器和气动元件，故障率低，性能稳定可靠，使用寿命长；

★本机适用于食品、制药、日化、农药、化妆品等行业。

Structure and performance specification:

★This machine combines self-motion setting cap, putting cap and screw cap to one with fast speed, high efficiency to steadily and reliably operate.

★Use advanced sensing element to ensure stop sending cap in case of no bottle, automatic stopping machine and alarming when cap getting stuck and lack of cap so as to ensure the reliability of automatic putting cap.

★Use the world famous brand electric appliances and pneumatic elements with low failure rate, steady and reliable performance and long service life.

★This machine can be suitable for food, pharmacy, daily use chemical, pesticide cosmetic and other industries.

技术参数(Technical parameters)：

生产能力 Production capacity	30-40 罐/分钟
功率 Power	1. 22Kw 220V 50Hz
尺寸 Size	L3000*W900*H1600mm
重量 Weight	250kg

STB1300 全自动伺服贴标机
Automatic dual servo driving labeling machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★适用各类圆周产品单标、双标、定位贴标，并可自适应带锥度产品；可单机使用也可连线使用，如啤酒瓶贴标，饮料瓶贴标，洗发水贴标，化妆品瓶子贴标等；
★贴标质量优，贴标平整，无褶皱；
★智能控制，自动光电跟踪，具有无物不贴标功能；
★调整简单，贴标速度、输送速度和分瓶速度可实现无极调速，根据需求进行调整；

Structure and performance specification:
★ It is suitable for production round shape for single, double or located labeling. It can be adjusted for cone-shaoed products. It can be used individually or attached to assemble line. It is widly used with bear bottle beverage bottle. shampoo and comestic.
★Good labeling performance ,label is flat with wrinkle.
★Intelligent control, automatic photo electric tracking with labeling, no objects no labeling.
★Easy adjustment, labeling speed and conveying speed and bottle allocation speed can be dujusted

技术参数(Technical parameters)：

贴标速度Labeling speed	25-60P/min
贴标精度Label accuracy	±1mm
适用产品规格 Applicable product size	直径20-110mm，high 30-350mm
适用标签范围 Applicable label scope	长度10-350mm，high 10-150mm
最大标签供应 Maximum label supply	外径300mm以内，内径76mm以内
重量 Weight	190kg
尺寸 Size	L1980*W1500*H1700mm
电压 Voltage	AC220V 50Hz

TB130P 全自动平面贴标机
Automatic plane labeling machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★适用各类卡类、PE袋自动分页和贴标，应用先进的柔软性分卡技术，分卡流畅且不刮花产品；
★彩盒分页贴标，未成形的彩盒，层叠放置在分页机上，分页机实现自动分页，分页后输送到贴标机上进行贴标；
★PET塑料袋分页贴标，跟彩盒分页贴标一样，层叠放置PET塑料袋，实现自动分页贴标。

Structure and performance specification:
★It is suitable for all kinds of cards, PE plastic bag automatic pagination and labeling. Avranced pagination technology and good perform.
★Color box paging: unformed color box, stacked on the paging machine, the paging machine realizes automatic paging, and then conveys to the labeling machine for labeling.
★PET plastic bag paging labeling same as color box paging labeling, stacked PET plastic bags to achieve automatic paging & labeling.

技术参数(Technical parameters)：

贴标速度Labeling speed	约0-150P/min
贴标精度Label accuracy	±1mm
适用产品规格 Applicable product size	长：40mm～400mm 宽：40mm～300mm 高：0.2mm～200mm；
适用标签范围 Applicable label scope	长度：6mm～260mm 宽度（底纸宽度）：15mm～150mm；
最大标签供应 Maximum label supply	外径300mm以内，内径76mm以内
重量 Weight	190kg
尺寸 Size	L2200*W1100*H1500mm
电压 Voltage	AC220V 50Hz

TB130CM-2 全自动双侧面贴标机
Automatic double side labeling machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★适用于各类扁瓶、圆瓶、方瓶的单面或双面贴标；
★可加装搓滚圆瓶贴标机构，实现圆瓶圆周面高速贴标；
★可加装圆瓶定位贴标机构，实现圆瓶定位贴标或双面贴标；
★可加装三面、四面覆标机构，实现方瓶三面、四面贴标。

Structure and performance specification:
★ Applicable for single or double sided label for various of flat, round and square bottles.
★ Can be installed bottle labeling roller mechanism to achieve high speed labeling around surface.
★Can be installed round bottle positioning labeling mechanism to achieve round bottle positioning labeling or double-sided labeling.
★Can be installed on three sides and four sides labeling mechanism to achieve three sides and sides labeling for rectangular bottles.

技术参数(Technical parameters)：

贴标速度Labeling speed	30~120 pieces/minute
贴标精度Label accuracy	±1.5mm
适用产品规格 Applicable product size	直径Φ25mm～Φ150mm，高度30-350mm
适用标签范围 Applicable label scope	长度：6mm～260mm 宽度（底纸宽度）：15mm～150mm
功率 Power	2.24Kw
重量 Weight	185kg
尺寸 Size	L3200*W1350*H1500mm
电压 Voltage	AC220V 50Hz

TBS130 全自动套标机
Automatic sleeve standard machine







扫码看视频
More Video Pls Scan

结构及性能描述：
★适用范围广，适合食品、饮料、清洁用品、药品、酒瓶等各式塑料瓶、玻璃瓶、PVC、PET、PS、铁罐等容器；
★高品质的定位精度：全机械式传动设计，采用强迫套标，各种膜料0.03mm以上膜厚可使用，膜料内径5-10mm范围可调整；
★低耗材的维护成本：本机采用低成本之舍弃式刀片，更换方便，成本负担低；
★多瓶型的弹性选择：可套圆瓶、方瓶、椭圆瓶等，也可以选择套瓶口或瓶身。

Structure and performance specification:
★A wide range of applications, suitable for food,beverages,cleaning supplies, medicines, bottles and other plastic bottles, glass bottles, PVC,PET,PS tin cans and other containers.
★High quality positioning accuracy: full mechanical transmission design, use forced sleeve labeling, various film material above 0.03mm. Above film thickness can be used, film material inner diameter 5-10 range can be adjusted from 5-10mm
★Maintenance cost of low consumable material: the machine adopts low-cost discarded blade, easy to replace, low cost burden.
★Flexible choice of multi-bottle type :can sleeve round bottle, square bottle, elliptical bottle, etc. can also sleeve the bottle mouth or bottle body.

技术参数(Technical parameters)：

套标速度Labeling speed	0-100瓶/min
瓶身直径/高度 Bottle diameter/height	定制
收缩高度 Size of main frame	直径20-110mm，high 30-350mm
纸卷内径 Paper roll diameter	长度10-350mm，high 10-150mm
电压 Voltage	AC220V/380V 50/60Hz
重量 Weight	600kg
尺寸 Size	L1500*W1050*H2000mm
功率 Power	3.5kW