


液压打包机
整厂清废打包除尘系统
专业生产厂家

Baling Press System
For Waste Disposal Solution





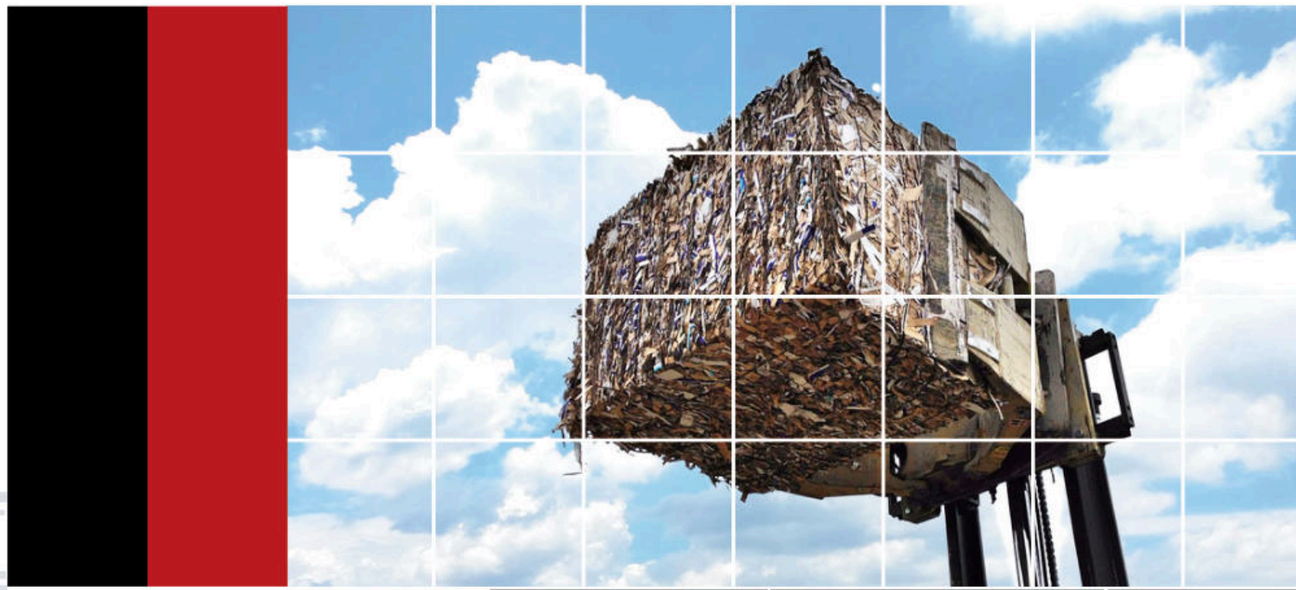

江苏旭田环保机械有限公司
Jiangsu Xutian Environmental Protection Machinery Co.,Ltd.

2025 Version

Baling Press System
For Waste Disposal Solution

一厂：江苏旭田环保机械有限公司
地址：江苏省南通市通州区西亭工业园青年东路158号
电话：0086-513-86831966 传真：0086-513-86831900
邮箱：sales@xtbaler.com

Factory 01:Jiangsu Xutian Environmental Protection Machinery Co.,Ltd.
Add:No.158,Qingnian East Road,Xiting Industry Park,Nantong City 226301,P.R.China
Tel:0086-513-86831966 Fax:0086-513-86831900 E-mail:sales@xtbaler.com

二厂：江苏旭鹏智能科技有限公司
地址：江苏省通州湾江海联动开发示范区乐海大道东，钱塘江路66号
Factory 02:Jiangsu Super Intelligent Technology Co., Ltd.
Add:No. 66, Qiantang River Road, Tongzhou Bay District, Nantong City, Jiangsu, China

www.xtbaler.com www.xtpack.eu
中文网址 www.xtpack.com
全国服务热线：400 8258 520

公司简介Company Profile

江苏旭田环保机械有限公司是一家拥有二十余年历史的液压打包机专业制造工厂。工厂坐落于美丽的南通西亭工业区，占地15000平方米，交通极为便利，距离上海仅有一个半小时的车程。二期工厂占地33000平方米，坐落于南通市通州湾示范区，已于2022年底投入使用。

工厂设施先进，设备齐全，拥有一系列精密加工设备，是国内首屈一指的现代化工厂，公司具有严格的质量控制体系，对所有的原材料和部件进行严格把关，每个工艺流程都设定了质量控制指标，给出了明确要求，每台打包机的生产和质量检验记录都完善保存，每台打包机在出厂前都经过严格的检测并出具检验合格证。

公司主要产品分为立式打包机、全自动卧式打包机、半自动卧式打包机、套袋机、输送机、风机、分离器、除尘器等几大系列，在国内拥有越来越高的市场份额并出口日本、东南亚、欧美及非洲等地区。

经过不断提升与创新，公司现已拥有欧盟CE认证、SGS、ISO9001:2015质量体系认证、TüV 认证，并拥有几十项自主研发专利，被授予国家高新科技企业称号、专精特新企业称号等。

一直以来，公司以一流的技术，可靠的品质及完善的售后服务，赢得了国内及世界各地用户的信赖及普遍赞誉。

面对未来，旭田公司秉承一贯的“质量至上”的宗旨，精心打造“XTpack”品牌，与客户携手共同发展。

XTpack locates in Xiting Industral Zone of Nantong City, PRC. it is only 135km away from Shanghai Hongqiao airport (1.5hours driving).We are professional in hydraulic baler's manufacturing for decades years. Facility's land size is more than 15000㎡.The second phase plant covers an area of 33000㎡ and is located in Tongzhou Bay Demonstration Zone of Nantong City, which has been put into use by the end of 2022.

A well equipped facility has been set up since many years ago before we were a leading manufacturer in baler industry. The compact quality control system is not only in parts and finish goods inspection but also embedded in process control. Detailed working instructions were published in every workstation. The records of manufacturing and inspection will be well kept for a long time. Every baler, before sent to customer ,will get a certification after a set of warm up running and inspection.

Our standard products cover vertical baler, semi-automatic horizontal baler, automatic horizontal baler, bagging machine, conveyor, shredding fan,separator,dust collector etc.. We are not only getting bigger and bigger marketing share in China but also becoming a global player with the export business growing very fast.

XTpack has passed CE/SGS/TUV/ISO9001 certifications. Dozens of patents were registered. High-tech award was given by local government because of excellent engineering design contribution for recycling industry.

XTpack was, is, and will be your best choice.

发展历程 Development history







◎ 一期工厂占地20亩



◎ 二期工厂占地50亩

全自动打包机
Full Automatic Balers

机器特点

- 光电开关自动检测物料是否加满，实现全自动功能
- 合理的双剪式刀片设计，提高了切纸效率，延长刀片的使用寿命
- 独特的防滑落设计，避免梯形包的出现，使包块更美观
- 主油缸采用炮耳支架及球端面设计，可消除作用在主轴上的扭矩，显著延长油封寿命
- 装配独特的捆线装置，从而减低故障率并便于清洁保养及维修
- 采用差动技术，使打包速度更快，从而提高工作效率，节省功率
- 机器出口处四方向浮动缩口，从而自动分配四面的压力，可广泛用于各种不同物质的压缩
- 可自由设定出包长度，准确记录打包数值，方便操作者使用
- 故障自动诊断，自动显示，提高检测效率
- 国际标准的电路布置、图示化操作指示以及详细的部件标示，是操作者简单易懂并提高维护效率
- 压车经过龙门铣床加工，确保运动时的精度
- 本机采用原装台湾进口液压系统，使机器更安全耐用
- 无需特殊的场地基础设施，使安装简单容易
- 机身采用“HARDOX”耐磨板

Features

- Photoelectric switch activates baler when charge box is full
- Unique double-cutting design of cutters improves the cutting efficiency and lengthens the lifespan of the cutters
- Particular anti-slide design of the machine makes nicer bales
- Unique trunnion-mounted frame and ball-end joint design for the main cylinder avoid the torque on the rod, which lengthens the lifespan of the seals
- Equipped with rapid automatic tying system, easy for cleaning and maintaining
- Use differential technique for the hydraulic system, makes shorter cycle time so that improve the working efficiency and save electricity
- Automatic tension system ensures “brick-like” bales on all loose materials.
- Adjustable bales length and bales quantity accumulating function make the operation of the machine more convenient
- Automatically detect and show the errors of the machine which improve the machine inspection efficiency
- International standard electric circuit layout, graphic operation instruction and detailed parts marks make the operation been more easily understanding and improves the maintenance efficiency
- The press heads are specially processed by planomiller, ensures the precise running of the ram
- Use high quality hydraulic system from Taiwan, ensures the stable running of the machine
- The heavy duty machine body makes sure only flat ground is required by the installation
- “HARDOX”in my body

www.xtbaler.com www.xtpack.com TÜV 1999 CE SGS

大型全自动打包机
Large-Sized Full Automatic Balers

机器应用


专门用于废纸、废旧纸板，纸箱厂边角料，废书本，废杂志，塑料膜，秸秆等松散物的回收压缩打包。

Usage


Specialized in recycling and compressing the loose materials like waste paper, cardboards,carton trims,waste books, magazines,plastic film,natural fiber and straw etc.




Horizontal Tying Bale size
(Model XTY-1000W110110-60)

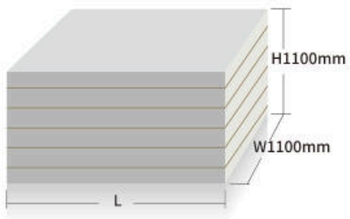

Vertical Tying Bale size
(Model XTY-1000W110110-60)



Cross Tying Bale size
(Model XTY-1000W110110-60)

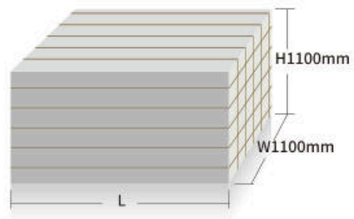

SGS CE 1999 TÜV www.xtbaler.com www.xtpack.com

参数 Specifications

型号 Model	XTY-1000W11080-60	XTY-1000W11080L-60	XTY-1000W110110-60	XTY-1000W110110L-60
压力 Pressure	100tons	100tons	100tons	100tons
主电机功率 Main Motor Power	45kW	45kW	45kW	45kW
冷却方式 Cooling System	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler
循环时间(空载) Cycle Time(Unload)	14s	16s	14s	16s
油箱尺寸 Oil Reservoir	1600L	1600L	1600L	1600L
捆包道数 Number of Belting	4lines	4lines	5lines	5lines
捆包铁丝规格 Wire Size	Ø3.0-3.2	Ø3.0-3.2	Ø3.0-3.2	Ø3.0-3.2
加料口尺寸(L×W) Feeding Opening Size(L×W)	1780×1050mm	1980×1050mm	1780×1050mm	1980×1050mm
包块尺寸Bale Size (L×W×H, L can be adjustable)	L×1100×800mm	L×1100×800mm	L×1100×1100mm	L×1100×1100mm
打包密度(OCC) Bale Density(OCC)	400-500kgs/m³	400-500kgs/m³	400-500kgs/m³	400-500kgs/m³
产量(30-60kgs/m³) Throughput(30-60kgs/m³)	5-9tons/h	5-10tons/h	6-11tons/h	6-12tons/h
机器重量 Machine Weight	15tons	16tons	17tons	18tons
机器外观尺寸 Machine Overall Dimension	8500×4000×4200mm	9100×4000×4200mm	8700×4000×4200mm	9300×4000×4200mm
捆扎方式 Tying	水平捆扎, 垂直捆扎或者交叉捆扎 Horizontal Tying,Vertical Tying or Cross Tying			
送料装置 Feeding Device	Conveyor	Conveyor	Conveyor	Conveyor
传输机 Conveyor				
宽度 Feeding Width	1600mm	1800mm	1600mm	1800mm
速度 Speed	18m/min	18m/min	18m/min	18m/min
功率 Power	5.5kW	5.5kW	5.5kW	5.5kW
重量 Weight	6tons	7tons	6tons	7tons
外观尺寸 Overall Dimension	11000×2100×5100mm	11000×2300×5100mm	11000×2100×5100mm	11000×2300×5100mm
打散器（适用于回收报纸）Used for newspaper				
马达Motor	15kW*2	15kW*2	15kW*2	15kW*2

参数 Specifications

型号 Model	XTY-1250W110110-75	XTY-1250W110110L-75	XTY-1250W110125-75	XTY-1250W110125L-75
压力 Pressure	125tons	125tons	125tons	125tons
主电机功率 Main Motor Power	55kW	55kW	55kW	55kW
冷却方式 Cooling System	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler
循环时间(空载) Cycle Time(Unload)	15s	17s	15s	17s
油箱尺寸 Oil Reservoir	1900L	1900L	1900L	1900L
捆包道数 Number of Belting	5lines	5lines	5lines	5lines
捆包铁丝规格 Wire Size	Ø3.0-3.4	Ø3.0-3.4	Ø3.0-3.4	Ø3.0-3.4
加料口尺寸(L×W) Feeding Opening Size(L×W)	1780×1050mm	1980×1050mm	1780×1050mm	1980×1050mm
包块尺寸Bale Size (L×W×H, L can be adjustable)	L×1100×1100mm	L×1100×1100mm	L×1100×1250mm	L×1100×1250mm
打包密度(OCC) Bale Density(OCC)	450-550kgs/m³	450-550kgs/m³	450-550kgs/m³	450-550kgs/m³
产量(30-60kgs/m³) Throughput(30-60kgs/m³)	7-13tons/h	7-14tons/h	8-15tons/h	8-16tons/h
机器重量 Machine Weight	19tons	20tons	21tons	22tons
机器外观尺寸 Machine Overall Dimension	9000×4100×4200mm	9600×4100×4200mm	9000×4100×4200mm	9600×4100×4200mm
捆扎方式 Tying	水平捆扎, 垂直捆扎或者交叉捆扎 Horizontal Tying,Vertical Tying or Cross Tying			
送料装置 Feeding Device	Conveyor	Conveyor	Conveyor	Conveyor
传输机 Conveyor				
宽度 Feeding Width	1600mm	1800mm	1600mm	1800mm
速度 Speed	18m/min	18m/min	18m/min	18m/min
功率 Power	5.5kW	5.5kW	5.5kW	5.5kW
重量 Weight	6tons	7tons	6tons	7tons
外观尺寸 Overall Dimension	12000×2100×5300mm	12000×2300×5300mm	12000×2100×5300mm	12000×2300×5300mm
打散器（适用于回收报纸）Used for newspaper				
马达Motor	15kW*2	15kW*2	15kW*2	15kW*2

参数 Specifications

型号 Model	XTY-1500W110110-150	XTY-1500W110125-150	XTY-2000W110125L-180	XTY-4000W110110-180
压力 Pressure	150tons	150tons	200tons	400tons
主电机功率 Main Motor Power	55kW×2	55kW×2	45kW×3	45kW×3
冷却方式 Cooling System	water cooler	water cooler	water cooler	water cooler
循环时间(空载) Cycle Time(Unload)	12s	12s	11s	25s
油箱尺寸 Oil Reservoir	2600L	2600L	2800L	2800L
捆包道数 Number of Belting	5lines	5lines	5lines	5lines/6lines
捆包铁丝规格 Wire Size	Ø3.0-3.6	Ø3.0-3.6	Ø3.0-3.6	Ø3.0-3.6
加料口尺寸 Feeding Opening Size(L×W)	2180×1050mm	2180×1050mm	2180×1050mm	2180×1050mm
包块尺寸Bale Size (L×W×H, L can be adjustable)	L×1100×1100mm	L×1100×1250mm	L×1100×1250mm	L×1100×1100mm
打包密度(OCC) Bale Density(OCC)	550-600kgs/m^3	550-600kgs/m^3	550-600kgs/m^3	550-600kgs/m^3
产量(30-60kgs/m^3) Throughput(30-60kgs/m^3)	15-20tons/h	17-25tons/h	20-30tons/h	25tons/18.5tons (30%-40%湿浆wet pulp/ 12%-20%干浆dry pulp)
机器重量 Machine Weight	35tons	37tons	40tons	45tons
机器外观尺寸 Machine Overall Dimension	11600×4200×6000mm	11600×4200×6000mm	12000×4200×6000mm	12000×4300×6000mm
捆扎方式 Tying	水平捆扎，垂直捆扎或者交叉捆扎 Horizontal Tying,Vertical Tying or Cross Tying			
送料装置 Feeding Device	Conveyor	Conveyor	Conveyor	Conveyor
出包自动称重 Automatic Weighing System	客户可选Optional			
传输机 Conveyor				
宽度 Feeding Width	2000mm	2000mm	2000mm	2000mm
速度 Speed	18m/min	18m/min	18m/min	18m/min
功率 Power	11kW	11kW	11kW	11kW
重量 Weight	14tons	14tons	15tons	14tons
外观尺寸 Overall Dimension	16000×2400×6200mm	16000×2400×6200mm	16000×2400×6200mm	16000×2400×6200mm
打散器（适用于回收报纸）Used for newspaper				
马达Motor	15kW*2	15kW*2	15kW*2	15kW*2

大型全自动打包机
Large-Sized Full Automatic Balers



www.xtbaler.com www.xtpack.com TÜV 1999 CE SGS

SGS CE 1999 TÜV www.xtbaler.com www.xtpack.com

中型全自动打包机
Medium-Sized Full Automatic Balers

机器应用


专门用于废纸、废旧纸板，纸箱厂边角料，塑料膜，秸秆等松散物的压缩打包

Usage


Widely used for compressing waste cardboards,cartons,paper,plastic film, straw etc.



Horizontal Tying Bale size
XTY-600W11075-30

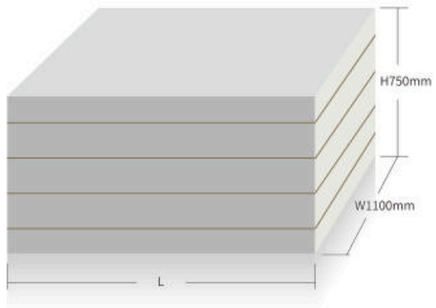

Vertical Tying Bale size
XTY-600W11075-30

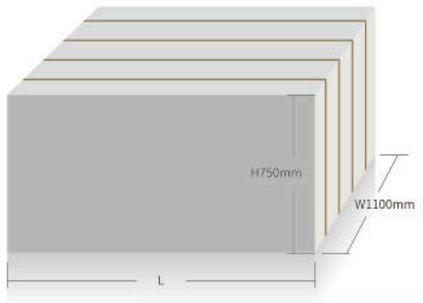



参数 Specifications

型号 Model	XTY-600W11075-30	XTY-800W11080E-30	XTY-800W11075-50 XTY-800W11075KL-50	XTY-800W11075L-50
压力 Pressure	60tons	80tons	80tons	80tons
主电机功率 Main Motor Power	22kW	22kW	37.5kW	37.5kW
冷却方式 Cooling System	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler
循环时间(空载) Cycle Time(Unload)	24s	22s	16s	28s
油箱尺寸 Oil Reservoir	1000L	1200L	1100L	1100L
捆包道数 Number of Belting	4lines	4lines	4lines	4lines
捆包铁丝规格 Wire Size	Ø2.7-3.2	Ø2.7-3.2	Ø2.7-3.2	Ø2.7-3.2
加料口尺寸 Feeding Opening Size(L×W)	1780×1050mm	1480×1050mm	1780×1050mm	2580×1050mm
包块尺寸Bale Size (L×W×H, L can be adjustable)	L×1100×750mm	L×1100×800mm	L×1100×750mm	L×1100×750mm
打包密度(OCC) Bale Density(OCC)	400-500kgs/m³	420-500kgs/m³	420-500kgs/m³	420-500kgs/m³
产量(30-60kgs/m³) Throughput(30-60kgs/m³)	3-7tons/h	3-6tons/h	4-8tons/h	5-9tons/h
机器重量 Machine Weight	13tons	12tons	14tons	15tons
机器外观尺寸 Machine Overall Dimension	7950×4100×3500mm	6800×4100×3500mm	8100×4100×3500mm 9500×4200×3500mm	9500×4100×3500mm
捆扎方式 Tying	水平捆扎或者垂直捆扎 Horizontal Tying or Vertical Tying			
送料装置 Feeding Device	Conveyor	Conveyor	Conveyor	Conveyor

传输机 Conveyor				
宽度 Feeding Width	1600mm	1200mm	1600mm	2000mm
速度 Speed	18m/min	18m/min	18m/min	18m/min
功率 Power	4kW/5.5kW	4kW/5.5kW	4kW/5.5kW	7.5kW
重量 Weight	5tons	4tons	5tons	6tons
外观尺寸 Overall Dimension	9000×2100×4500mm	9400×1550×4300mm	9000×2100×4500mm	9000×2500×4500mm

小型全自动打包机
Small-Sized Full Automatic Balers

机器应用


专门用于废纸、废旧纸板，纸箱厂边角料等松散物的压缩打包。

Usage

Specially used for recycling waste paper, cartons/cardboards trims/scrapes etc.which are popular in packaging/ corrugation industrial, paper/ printing plants etc.



瓦楞纸箱行业整厂废纸处理系统示意图
The Diagram Of Waste Management Systems In Packaging Industry

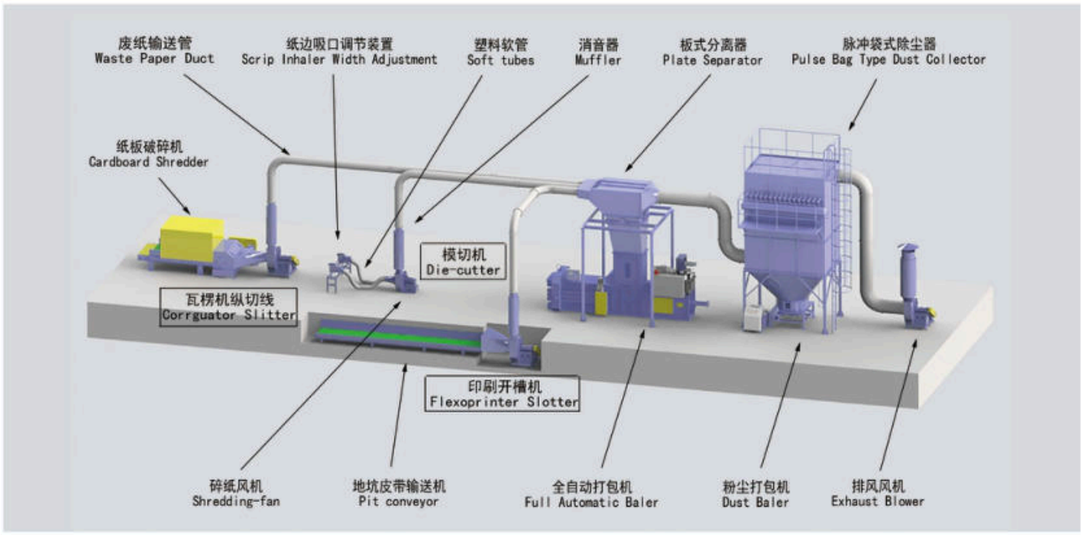

参数 Specifications

型号 Model	XTY-200W5050-15	XTY-400W7575-20 XTY-600W7575L-25	XTY-400W7280-20	XTY-600W7585-25
压力 Pressure	20tons	40tons/60tons	40tons	60tons
主电机功率 Main Motor Power	11kW	15kW/18.5kW	15kW	18.5kW
冷却方式 Cooling System	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler	air cooler/water cooler
循环时间 Cycle Time(Unload)	14s	17s/24s	20s	16s
油箱尺寸 Oil Reservoir	280L	540L	540L	600L
捆包道数 Number of Belting	3lines	3lines/4lines	4lines	4lines
捆包铁丝规格 Wire Size	Ø2.4-3.2	Ø2.4-3.2	Ø2.4-3.2	Ø2.4-3.2
加料口尺寸(L×W) Feeding Opening Size(L×W)	750×480mm	1250×720mm 1750×720mm	1250×690mm	1250×720mm
包块尺寸(L×W×H, L可调) Bale Size(L×W×H, L can be adjustable)	L×500×500mm	L×750×750mm	L×720×800mm	L×750×850mm
打包密度(OCC) Bale Density(OCC)	350-450kgs/m^3	350-450kgs/m^3	350-450kgs/m^3	380-480kgs/m^3
产量(30-60kgs/m^3) Throughput(30-60kgs/m^3)	1-1.5tons/h	1.5-3tons/h 2-3.5tons/h	1.5-3tons/h	2.5-5tons/h
机器重量 Machine Weight	3tons	7tons/8 tons	7tons	8tons
机器外观尺寸 Machine Overall Dimension	3600×2500×1650mm	5950×3200×2500mm 7000×3200×2500mm	5950×3200×2500mm	6100×3250×2500mm
送料装置(可选) Feeding Device (optional)	Cyclone/conveyor	Cyclone/conveyor	Cyclone/conveyor	Cyclone/conveyor

分离器 Cyclone				
处理风量 Air Volume	9000-15000m^3/h	10000-20000m^3/h	15000-30000m^3/h	20000-35000m^3/h

中型全自动打包机
Medium-Sized Full Automatic Balers



小型全自动打包机
Small-Sized Full Automatic Balers



PBA系列全自动打包机
PBA Series Full Automatic Balers

机器应用

专门用于废纸、废旧纸板，纸箱厂边角料等松散物的压缩打包。

Usage

Specially used for recycling waste paper, cardboards trims/ scrapes etc.which are popular in packaging/ corrugation industrial, paper/ printing plants etc.







参数 Specifications

型号 Model	PBA75	PBA85	PBA85L	PBA1108
压力 Pressure	40tons	60tons	60tons	80tons
主电机功率 Main Motor Power	11kW	15kW	18.5kW	30kW
冷却方式 Cooling System	工业油冷机/风冷 Industrial Oil Cooler/Air Cooler			
循环时间(空载) Cycle Time(Unload)	21s	19s	24s	24s
油箱尺寸 Oil Reservoir	540L	540L	600L	1000L
捆包道数 Number of Belting	3lines	4lines	4lines	4lines
捆包铁丝规格 Wire Size	Ø2.4-3.2	Ø2.4-3.2	Ø2.4-3.2	Ø2.4-3.2
加料口尺寸(L×W) Feeding Opening Size(L×W)	1250×720mm	1250×720mm	1650×720mm	1680*1050mm
包块尺寸(L×W×H, L可调) Bale Size (L×W×H, L can be adjustable)	L×750×750mm	L×750×850mm	L×750×850mm	L*1100*800mm
打包密度(OCC) Bale Density(OCC)	350-450kgs/m^3	380-480kgs/m^3	380-480kgs/m^3	450-520kgs/m^3
产量(30-60kgs/m^3) Throughput(30-60kgs/m^3)	1.5-3tons/h	2.5-5tons/h	3.5-6tons/h	4-8tons/h
机器重量 Machine Weight	7tons	8tons	9tons	12tons
机器外观尺寸 Machine Overall Dimension	5950×3200×2500mm	5950×3200×2500mm	6800×3200×2500mm	7200×4000×3500mm
送料装置(可选) Feeding Device (optional)	Cyclone/conveyor	Cyclone/conveyor	Cyclone/conveyor	Cyclone/conveyor

大型全自动双压头打包机
Large-Sized Full Automatic Two Ram Balers

机器应用

这种大型全自动双压头打包机不仅能够压缩出很大的包块重量同时也适用于多种材质的理想选择，物料种类包括OCC，塑料膜，HDPE，PET，铝罐，铁罐，各种塑料瓶，塑料筐，废旧轮胎，废旧白色家电（如旧冰箱，洗衣机，微波炉），废旧铝合金门框，薄铁皮等。

Usage

The two ram baler not only can achieve maximum bale weight, but can also bale many different materials including OCC, plastic film, HDPE, PET, aluminum cans, steel cans, various plastic bottles, plastic baskets, waste tyres, waste household appilances (such as refrigerators, washing machines microwave ovens), aluminum alloy frame, iron sheet etc.



机器特点

- 采用美国进口ACCENT自动捆扎机，效率高，故障低；
- 所有油缸行程都是通过传感器控制，精度到0.1mm；
- 包块宽度可以根据不同的物料更改设定，开门机构自动适配，确保包块密度最大化；
- 采用超高强度剪切刀，安装刀片简易、快捷，可快速更换刀片，便于维护；
- 整机内腔全部采用瑞典HARDOX 耐磨板，经久耐用；
- 主推特殊设计，可以快速从腔体移出，方便维修；
- 物料容积自动感应，在成包时自动调节加料量；
- 捆扎道数、捆扎距离可按需调节；
- 根据不同的物料，可选择对应的程序，比如有塑料瓶/废纸/薄膜/废金属程序，大大提高压缩效率与产能；
- 与单腔体打包机相比，双压头打包机处理物料更加灵活，完全封闭、高强度的打包机腔室可以处理更广泛的物料；
- 整机高强度结构设计，减少受力弱点，使用寿命更长，可靠性更高；

Features

- Equipped with American ACCENT auto tie unit, high efficiency, low failure;
- All cylinders stroke is controlled by sensors with accuracy 0.1mm;
- The width of the bale can be revised according to different materials, and the door opening mechanism automatically adapts to ensure the maximum bale density;
- With extremely high strength knives, easy to install, quick to replace, convenient for maintenance;
- Equipped with Sweden HARDOX wearing liners, giving our customers longer run time between scheduled maintenance and replacement.
- Main Ram with special design can be quickly removed from the chamber, convenient maintenance;
- Automatic sensing of material volume in the hopper, automatically control the feeding device while baling;
- The number of strapping lines and strapping distance can be adjusted as needed;
- According to different materials, corresponding programs can be selected, such as plastic bottles/waste paper/films/scrap metals programs, greatly improving the compression efficiency and capacity;
- Compared with channel balers, two ram balers offer greater material processing flexibility. The completely enclosed, heavily reinforced baling chamber allows for easier processing of a wider range of materials.
- Built with a solid uni-body sidewall construction. They are designed and built specifically as one piece to reduce weak points creating a more structurally sound machine for longer lifetime and greater reliability.

参数 Specifications

型号 Model	XTR-1250W11075-75	XTR-1250W15075-75	XTR-2000W11075-150	XTR-2000W15075-150	XTR-2200W15085-200 XTR-2500W15085-150
压力 Pressure	125tons	125tons	200tons	200tons	220tons/250tons
主电机功率 Main Motor Power	55kW	55kW	55kW×2	55kW×2	75kW×2/55kW×2
冷却方式 Cooling System	风冷/水冷 Air Cooler/Water Cooler				
循环时间 Cycle Time(Unload)	18s	18s	10s	12s	14s/20s
捆包道数 Number of Belting	按需求设置 Set as demand				
捆扎方式 Tying	铁丝/PET捆扎带/缠绕 Wire/PET Strap/Film Wrapping				
加料口尺寸(L×W) Feeding Opening Size(L×W)	1780×990mm	1900×1390mm	1780×900mm	1900×1390mm	2650×1390mm 1900×1390mm
包块尺寸(L×H×W, W可调) Bale Size (L×H×W, W can be adjustable)	1100×750× (1150-1350)mm	1500×750× (900-1100)mm	1100×750× (1150-1350)mm	1500×750× (900-1100)mm	1500×850× (900-1100)mm
打包密度(OCC) Bale Density(OCC)	450-550kgs/m^3	450-550kgs/m^3	500-600kgs/m^3	500-600kgs/m^3	550-700kgs/m^3
产量(30-60kgs/m^3) Throughput(30-60kgs/m^3)	8-12tons/h	13-17tons/h	15-20tons/h	17-22tons/h	20-40tons/h 18-25tons/h
机器重量 Machine Weight	21tons	25tons	30tons	32tons	42tons/37tons
机器外观尺寸 Machine Overall Dimension	8800×4500× 3550mm	8300×5300× 3550mm	8800×4500× 3600mm	8300×5300× 3600mm	9800×5600×3660mm 8300×5600×3660mm
送料装置（可选） Feeding Device (optional)	Iron conveyor	Iron conveyor	Iron conveyor	Iron conveyor	Iron conveyor

传输机 Conveyor					
宽度 Feeding Width	1600mm	1700mm	1600mm	1700mm	2000mm/1700mm
速度 Speed	18m/min	18m/min	18m/min	18m/min	18m/min
功率 Power	7.5kW	11 kW	7.5kW	11 kW	11 kW
外观尺寸 Overall Dimension	12000×2100×5300mm	16000×2200×6200mm	12000×2100×5300mm	16000×2200×6200mm	16000×2500/2200×6200mm

全自动双压头打包机
Full Automatic Two Ram Balers

机器应用


适用于无纺布，塑料薄膜，铝膜，熔喷布等固体废料的回收打包，方便储运，减少人工成本。

Usage


Specialized in recycling and compressing solid waste materials like non-woven fabrics, plastic film, melting spray etc, convenient for storage, saving labor cost.



Diagram(Model XTR-200W5050P)

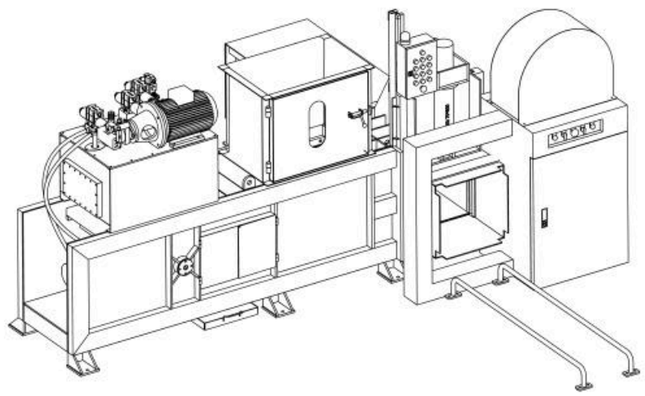

Bale Size(Model XTR-200W5050P)



参数 Specifications

型号 Model	XTR-200W5050P	XTR-400W7575P
压力 Pressure	20tons	40tons
电机功率 Motor Power	7.5kW	15kW
油箱容积 Oil Tank Volume	160L	540L
加料口尺寸(L×W) Feeding Opening Size(L×W)	700×460mm	1100×730mm
包块尺寸(L×W×H) Bale Size(L×W×H)	500×500×500mm	750×750×750mm
包块重量 Bale Weight	30-70kgs	70-150kgs
捆包道数 Number of Belting	3lines	3-5lines
机器外观尺寸(L×W×H) Machine Overall Dimension	3700×2700×1800mm	4650×3010×2430mm
机器重量 Machine Weight	2.5tons	4.5tons

机器特点

- 压缩、打包自动完成，使用PP带捆扎，降低辅材费用
- 双压头设计，占地面积小，机构紧凑
- 采用吸风系统送料或者输送机送料
- PLC控制，捆扎道数多重选择
- 包块可直接进行完全焚烧，不留杂质
- 操作简便



Features

- Automatically compressing and baling, using PP strap to reduce baling material cost
- With two rams design, compact machine structure occupying small space
- Cyclone system or conveyor could both be the optional for feeding
- With PLC control, number of belting is optional
- The bales could be directly burned out
- Easy to operate

卧式半自动打包机
Semi-Automatic Balers


机器应用

专门用于废纸，废旧纸板，塑料废膜等松散物的压缩打包。

Usage

Widely applied by cartons/cardboards, plastic film packaging plants,printing and paper factories etc.For recycling waste, cardboard/cartons trims,paper,scraps, plastic film etc.

Diagram (Model XTY-400WS7280)

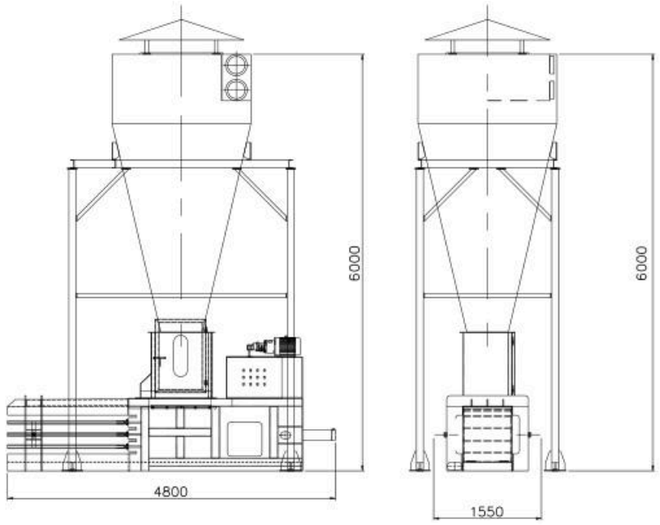





机器特点

- 开口式设计，使出包方便快捷，提高工作效率
- 闭口式设计，密度可以更高
- 可配吸风送料或者输送机送料
- 结构简单，操作方便

Features

- Open end design for conveniently ejecting bales out
- Closed end design makes sure high bale density
- Feeding device can be suction system or conveyor
- Simple design,easy to operate



参数 Specifications

机器类型 Machine Type	卧式半自动闭口 Semi-Automatic Baler With Closed End		卧式半自动开口 Semi-Automatic Baler	
型号 Model	XTY-300WB7070	XTY-400WB7280	XTY-400WS7280	XTY-1000WS110125-75
压力 Pressure	30tons	40tons	40tons	100tons
主电机功率 Main Motor Power	11kW	11kW	11kW	55kW
冷却方式 Cooling System	N/A	Air cooler/water cooler	N/A	Air cooler/water cooler
循环时间 Cycle Time(Unload)	27s	19s	20s	23s
油箱尺寸 Oil Reservoir	240L	240L	240L	1800L
捆扎道数 Number of Belting	3lines	4lines	4lines	5lines
捆包铁丝规格 Wire Size	Ø2.4-2.7	Ø2.4-2.7	Ø2.4-2.7	Ø3.0-3.2
加料口尺寸(L×W) Feeding Opening Size(L×W)	700×690mm	1000×700mm	1000×690mm	2080×1076mm
压缩腔尺寸(L×W×H) Chamber Size (L×W×H)	1700×690×690mm	2200×700×780mm	1200×720×780mm	2400×1076×1250mm
包块尺寸(L×W×H) Bale Size (L×W×H, L can be adjustable)	900×700×700mm	1000×720×800mm	L×720×800mm	L×1100×1250mm
打包密度(OCC) Bale Density(OCC)	400-500kgs/m^3	400-500kgs/m^3	350-450kgs/m^3	400-500kgs/m^3
产量 Throughput	0.5-1ton/h	0.5-1ton/h	0.5-1ton/h	5-8tons/h
机器重量 Machine Weight	4tons	4.5tons	5tons	16.5tons
机器外观尺寸 Machine Overall Dimension	4200×1100×1900mm	5500×1100×2000mm	4800×1500×2000mm	9100×2500×3500mm
送料装置 Feeding Device	Cyclone/belt conveyor	Cyclone/belt conveyor	Cyclone /belt conveyor	Iron conveyor

大中型闭口卧式打包机

Large sized&Medium sized Semi Automatic Balers With Closed End

机器应用

专门用于塑料薄膜，塑料瓶，塑料筐，废弃电脑壳，废纸，废旧纸板，纸箱，海绵等松散物的压缩打包。

Usage

Specialized in recycling and compressing the loose materials like plastic film,PET bottles, plastic pallets, waste computer shell, waste paper, cartons, cardboards trims/scraps,foam etc.



Bale Size(Model XTY-1000WB11085)


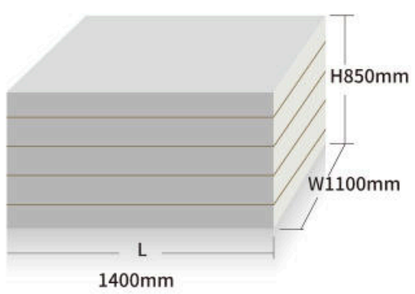


Diagram (XTY-1000WB11085)

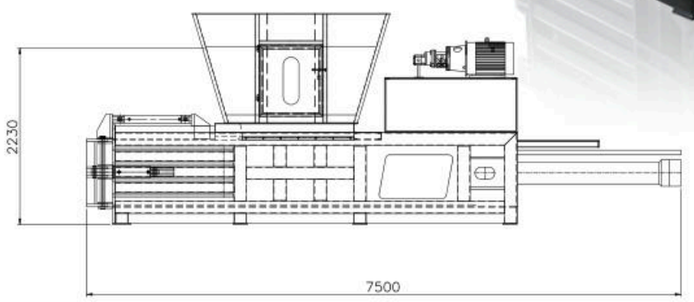

机器特点

- 闭口式结构，使得包打得更紧
- 高强度出包门，自动开关门，液压锁门，使操作更便捷
- 合理的双剪式刀片设计，提高了切纸效率，延长刀片的使用寿命
- 独特的防滑落设计，避免梯形包的出现，使包块更美观
- 主油缸采用炮耳支架及球端面设计，可消除作用在主轴上的扭矩，显著延长油封寿命
- 压车经过龙门铣床加工，确保运动时的精度
- 本机采用原装台湾进口液压阀，使机器更安全耐用
- 无需特殊的场地基础设施，使安装简单容易
- 机身采用“HARDOX”耐磨板

Features

- Heavy duty close-gate design for more tighter bales
- Hydraulic locked gate ensures more convenient operation
- Unique double-cutting design of cutters improves the cutting efficiency and lengthens the lifespan of the cutters
- Particular anti-slide design of the machine makes nicer bales
- Unique trunnion-mounted frame and ball-end joint design for the main cylinder avoid the torque on the rod,which lengthens the lifespan of the seals
- The press heads are specially processed by planomiller,ensures the precise running of the ram
- Use high quality hydraulic valves from Taiwan,ensures the stable running of the machine
- The heavy duty machine body makes sure only flat ground is required by the installation
- “HARDOX” in my body

参数 Specifications

卧式半自动闭口液压打包机 Semi-Auto Baler with Closed End						
型号 Model	XTY-600WB10080	XTY-1000WB11085/ XTY-1000WB110110	XFB-100	XFB-160	XFB-200	XFB-250
压力 Pressure	60tons	100tons	100tons	160tons	200tons	250tons
主电机功率 Main Motor Power	18.5kW	30kW	22kW	37kW	45kW	45kW
冷却方式 Cooling System	air cooler/ water cooler	air cooler/ water cooler	air cooler/ water cooler	air cooler/ water cooler	air cooler/ water cooler	air cooler/ water cooler
油箱尺寸 Oil Reservoir	550L	1460L	1500L	1800L	1800L	1800L
捆包道数 Number of Belting	4lines	4lines/5lines	5lines	5lines	5lines	5lines
加料口尺寸(L×W) Feeding Opening Size(L×W)	1380×980mm	1580×1050mm/ 2180×1050mm	2000×1050mm	2200×1050mm	2200×1050mm	2200×1050mm
压缩腔尺寸(L×W×H) Chamber Size (L×W×H)	2400×980×780mm	3000×1050×830mm/ 3800×1050×1050mm	4000×1100×1250mm	4200×1100×1250mm	4200×1100×1250mm	4200×1100×1250mm
包块尺寸 Bale size(L×W×H)	1000×1000×800mm	1400×1100×850mm/ 1600×1100×1100mm	1100×1250× (200-1700)mm	1100×1250× (200-1700)mm	1100×1250× (200-1700)mm	1100×1250× (200-1700)mm
打包密度(OCC) Bale Density(OCC)	450-550kgs/m^3	500-600kgs/m^3	500-600kgs/m^3	530-630kgs/m^3	550-650kgs/m^3	580-680kgs/m^3
产量 Throughput	1-2tons/h	1.5-3tons/h 2-6tons/h	3-6tons/h	4-7tons/h	5-8tons/h	6-9tons/h
机器重量 Machine Weight	5.2tons	12tons/18tons	16tons	18tons	22tons	23tons
机器外观尺寸 Machine Overall Dimension	6100×1400×2000mm	7450×1600×2300mm 9400×1600×3500mm	9700×1820×2620mm	9950×1565×2900mm	9950×1565×2900mm	10500×1645×2900mm
送料装置 Feeding Device	cyclone/ iron conveyor	iron conveyor	iron conveyor	iron conveyor	iron conveyor	iron conveyor

传输机 Conveyor						
宽度 Feeding Width	1000mm	1300mm/1600mm	1600mm	1600mm	1800mm	2000mm
速度 Speed	18m/min	18m/min	18m/min	18m/min	18m/min	18m/min
功率 Power	4kW	5.5kW	5.5kW	5.5kW	7.5kW	7.5kW
重量 Weight	5tons	7tons	8tons	8tons	9tons	9.5tons
外观尺寸 Overall Dimension	9000×1300×3000mm	9700×1900×2900mm 10500×1950×3200mm	10000×2200×3200mm	10000×2200×3200mm	10000×2400×3200mm	10000×2600×3200mm

大中型闭口卧式打包机

Large sized&Medium sized Semi Automatic Baler With Closed End



www.xtbaler.com www.xtpack.com TÜV 1999 CE SGS

SGS CE 1999 TÜV www.xtbaler.com www.xtpack.com

废纸/纸板/软塑料打包机
Paper/Carton/Soft Plastic Film Balers


机器应用

专门用于废旧瓦楞纸箱，纸板，报纸，软塑料等物料的回收压缩打包。

Usage


Specially designed for recycling waste cardboards, cartons and newspaper ,soft plastic film etc. with wide feed opening door.

Diagram (Model XTY-500LE15076)

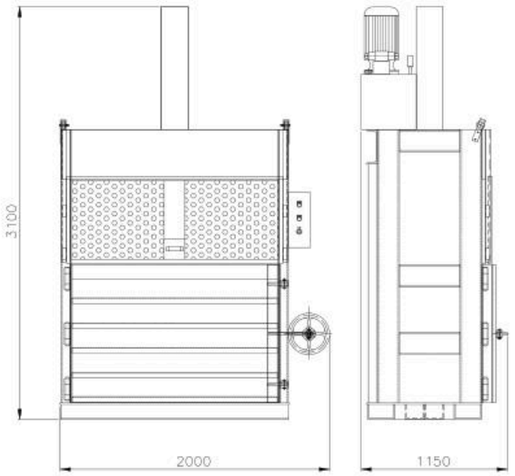



Bale Size (Model XTY-500LE15076)

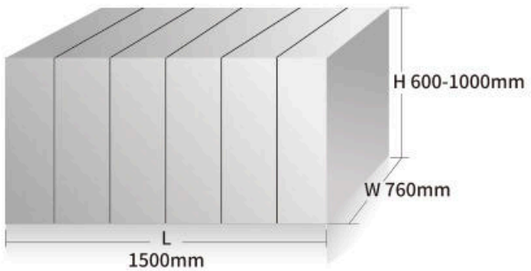

参数 Specifications

型号 Model	XTY-300LE11070	XTY-400LE12080	XTY-500LE15076	XTY-600LE180100
压力 Pressure	30tons	40tons	50tons	60tons
加料口尺寸 Feed Opening Size(L×H)	1100×500mm	1200×500mm	1500×500mm	1800×550mm
压缩腔高度 Baling Chamber Height	1400mm	1500mm	1500mm	1600mm
包块尺寸 (L×W×H, H可调) Bale Size(L×W×H, H is adjustable)	1100×700×(500-900)mm	1200×800×(600-1000)mm	1500×760mm×(600-1000)mm	1800×1000×(700-1050)mm
包块重量 Bale weight	150-250kgs	200-450kgs	300-500kgs	500-700kgs
功率 Power	5.5kW	7.5kW	7.5kW	11kW
机器重量 Machine Weight	1900kgs	2300kgs	2800kgs	4500kgs
机器外观尺寸 Machine Overall Dimension	1500×1050×2900mm	1650×1200×3100mm	2000×1150×3100mm	2260×1350×3170mm

机器特点

- 自动挂链出包，提高了工作效率
- 安全门垂直升降，操作方便，安全门不关闭，机器不启动，非常安全
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 采用台湾进口叠加式阀组，安装体积小，维修方便
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命



Features

- Automatic chain bale ejector for quickly and easily ejecting the bales out from the machine
- Wide feed opening door lifts upwards automatically when the platen goes up
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Equipped with superimposed valves that from Taiwan, less space required for the installation
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump

纺织品/服装/羊毛/棉花打包机
Textile/Clothes/Wool/Cotton Balers


机器应用

专门用于二手衣服，被子，鞋子， 羊毛，棉花等产品的回收打包，被大量使用在旧衣服，服装，羊毛，棉花回收工厂。


Usage

Widely applied by second-hand clothes, wool, cotton recycling plants for compressing second-hand clothing, comforters, shoes,wool,cotton etc.

Diagram (Model XTY-500LTX7555)

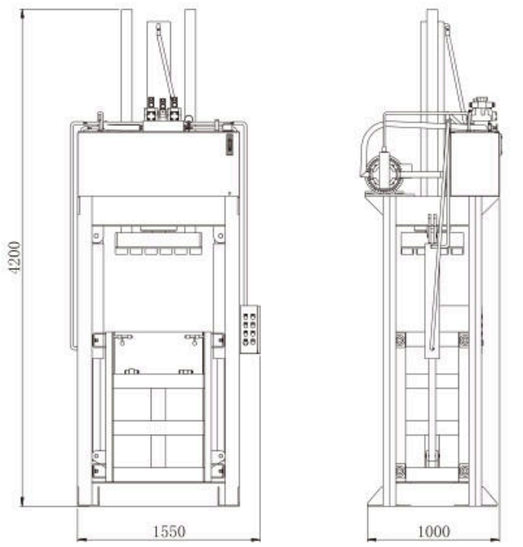

Bale Size (Model XTY-500LTX7555)

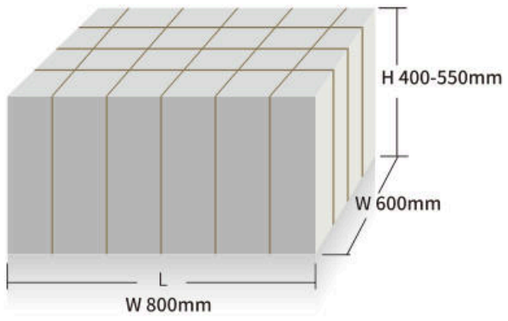



参数 Specifications

型号 Model	XTY-300LTX6040 XTY-300LTX7040	XTY-500LTX7555	XTY-1200LTX7540	XTY-1500LTX11080
压力 Pressure	30tons	50tons	120tons	150tons
加料口尺寸 Feed Opening Size(L×H)	600×400mm 700×400mm	750×350mm	750×450mm	1100×600mm
压缩腔高度 Baling Chamber Height	1250mm/1200mm	1850mm	1700mm	1850mm
包块尺寸 (L×W×H, H可调) Bale Size(L×W×H, H is adjustable)	630×430×(400-600)mm 730×430×(250-600)mm	800×600×(400-550)mm	800×450×(350-500)mm	1150×850×(500-900)mm
包块重量 Bale weight	40-60kgs	80-120kgs	90-150kgs	300-400kgs
功率 Power	7.5kW	11kW	18.5kW	18.5kW
机器重量 Machine Weight	1800kgs	2800kgs	3800kgs	6000kgs
机器外观尺寸 Machine Overall Dimension	1250×800×3700mm 1200×700×3500mm	1550×1000×4200mm	1600×1000×4550mm	2000×1450×4300mm

机器特点

- 液压提箱，提高工作效率，方便套包和#字捆包
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命





Features

- Hydraulic lifting chamber door improves the work efficiency, conveniently for packaging and the '# 'tying
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump

铝罐/PET瓶子打包机
Cans/PET Bottle Balers


机器应用

专门用于易拉罐，PET可乐瓶，油瓶等空心产品的压缩打包。


Usage

Specially used for recycling the cans, PET bottles, oil tank etc.

Diagram (Model XTY-300KL8060)

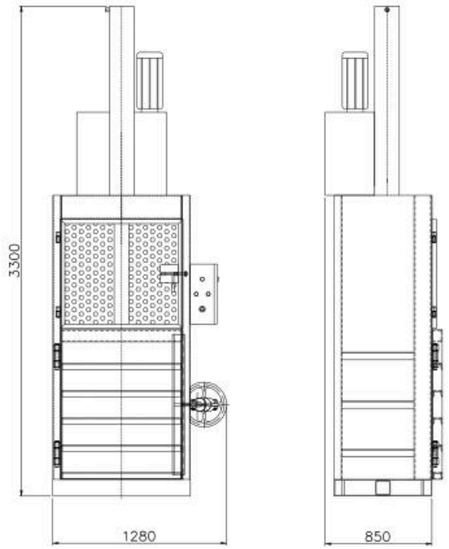

Bale Size (Model XTY-300KL8060)

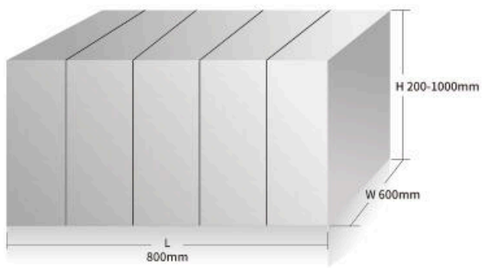



参数 Specifications

型号 Model	XTY-300KL8060	XTY-400KL10060	XTY-500KL11070	XTY-800KL12080
压力 Pressure	30tons	40tons	50tons	80tons
加料口尺寸 Feed Opening Size(L×H)	800×500mm	1000×500mm	1100×500mm	1200×500mm
压缩腔高度 Baling Chamber Height	1500mm	1500mm	1500mm	1700mm
包块尺寸 (L×W×H, H可调) Bale Size(L×W×H, H is adjustable)	800×600×(200-1000)mm	1000×600×(300-1000)mm	1100×700×(300-1000)mm	1200×800×(300-1200)mm
包块重量 Bale weight	30-120kgs	60-180kgs	90-270kgs	200-380kgs
功率 Power	5.5kW	7.5kW	7.5kW	15kW
机器重量 Machine Weight	1400kgs	1700kgs	1900kgs	2700kgs
机器外观尺寸 Machine Overall Dimension	1280×850×3300mm	1480×1000×3400mm	1600×1100×3500mm	1700×1200×3900mm

机器特点

- 自动挂链出包，提高了工作效率
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命





Features

- Automatic chain bale ejector for quickly and easily ejecting the bales out from the machine
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump

交叉油缸纸板打包机
Cardboard Balers with Cross Cylinder


机器应用

专门用于纸板，废纸，废塑料等类似产品的压缩打包。

Usage


Specialized in compressing cardboards, paper, plastic scraps etc.

Diagram (Model XTY-300LJ12080)

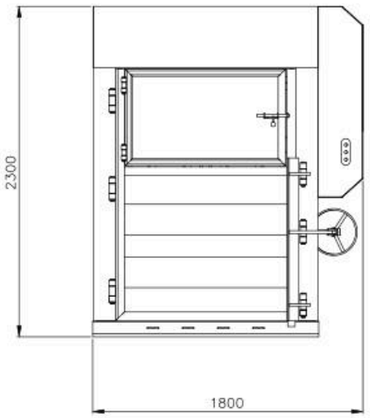



Bale Size (Model XTY-300LJ12080)

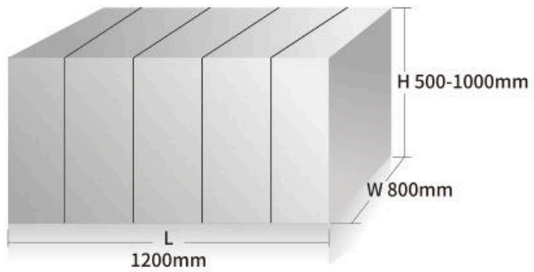

参数 Specifications

型号 Model	XTY-300LJ12080	XTY-500LJ12080
压力 Pressure	30tons	50tons
加料口尺寸 Feed Opening Size(L×H)	1050×550mm	1050×550mm
压缩腔高度 Baling Chamber Height	1600mm	1600mm
包块尺寸 (L×W×H, H可调) Bale size(L×W×H, H is adjustable)	1200×800×(500-1100)mm	1200×800×(500-1100)mm
包块重量 Bale Weight	200-400kgs	300-500kgs
功率 Power	4kW	4/5.5kW
机器重量 Machine Weight	2200kgs	2800kgs
机器外观尺寸 Machine Overall Dimension	1800×1400×2225mm	1800×1400×2255mm

机器特点

- 自动出包，显著的提高了工作效率
- 油缸交叉安装设计，降低了设备的高度，方便运输，安装及维修
- 采用开门停机设计，使机器更安全可靠
- 出包时双手按按钮，有效保护操作者安全
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- PLC控制，当满料时自动感应，确保每个包块的重量尺寸一致
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 采用低噪音设计，噪音不大于70分贝

Features

- Automatic bale ejector for quickly and easily ejecting the bales from the machine
- Cross-cylinder design reduces the height of the balers, conveniently for transportation, installation and maintenance
- The ram will stop running downwards when the feeding gate is opened which ensures the safety of the operation
- Equipped with independent emergency stop for safe operation
- Two hands are required for pressing the buttons when eject the bales out from the machine, ensures the safety of the operator
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- PLC control system ensures the uniform bale weight
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Low noise design, ensures the noise no more than 70db

小型立式打包机
Small Vertical Balers


机器应用

专门用于打包生活垃圾，废纸，废塑料等，被广泛用于工厂，船舶，宾馆以及旅游度假区。


Usage

Specially used for compressing the waste like food residue, paper, plastics and textile etc. which widely applied by the vessels, hotels, resorts and factories etc.

Diagram (Model SX-100LA6040)

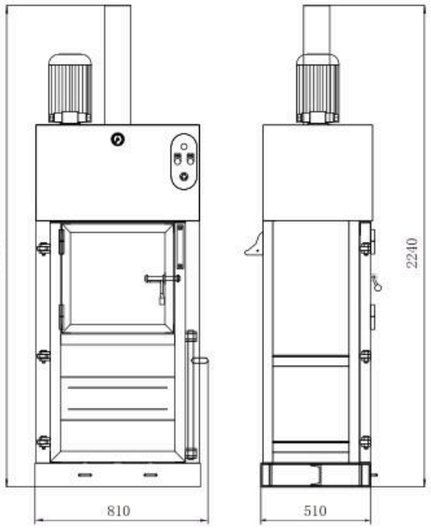

Bale Size (Model SX-100LA6040)

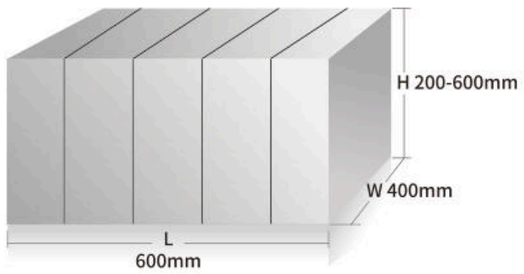



参数 Specifications

机器类型 Machine Type	小型立式打包机 Small Vertical Balers			双腔打包机 Twin Chamber Balers
型号 Model	SX-50LA6040	SX-100LA6040	SX-200LA8060	XTY-30L7050-D
压力 Pressure	5tons	10tons	20tons	3tons
加料口尺寸 Feed Opening Size(L×H)	600×400mm	600×400mm	700×400mm	700×500mm
压缩腔高度 Baling Chamber Height	1000mm	1000mm	1200mm	728mm
包块尺寸 (L×W×H, H可调) Bale size(L×W×H, H is adjustable)	600×400×(200-600)mm	600×400×(200-600)mm	800×600×(400-800)mm	700×500×(150-400)mm
包块重量 Bale Weight	15-40kgs	20-50kgs	60-120kgs	30-60kgs
功率 Power	1.5kW	2.2kW	3kW	0.75kW
机器重量 Machine Weight	450kgs	500kgs	1000kgs	500kgs
机器外观尺寸 Machine Overall Dimension	900×570×2240mm	900×570×2240mm	1180×800×2550mm	1600×560×1750mm

机器特点

- 自动挂链出包，提高了工作效率
- 选配接液槽设计，适用于压缩打包有水分的物料，确保水不流到底面上
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命





双腔打包机
Twin Chamber Baler

Features

- Automatic chain bale ejector for quickly and easily ejecting the bales out from the machine
- Bottom liquid receiver is optional for collecting the liquid from the compressing materials
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump

轮胎打包机
Tire Balers


机器应用

专门用于汽车轮胎、卡车轮胎等产品的回收打包，被大量用于轮胎回收中心。

Usage


Specially designed for compressing rubber products like car tires, truck tires, bus tires etc.

Diagram (Model XTY-1200LF210120)

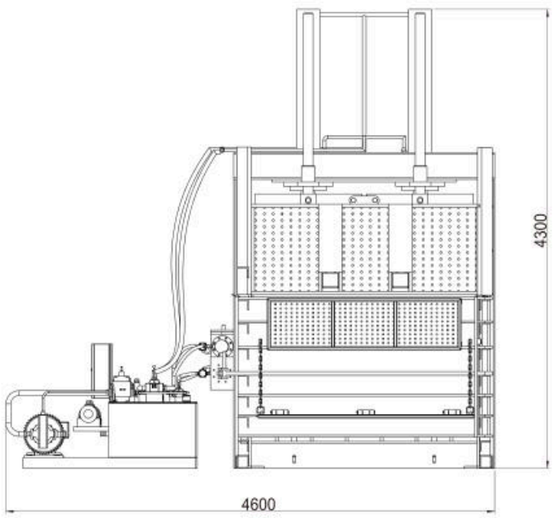



Bale Size (Model XTY-1200LF210120)

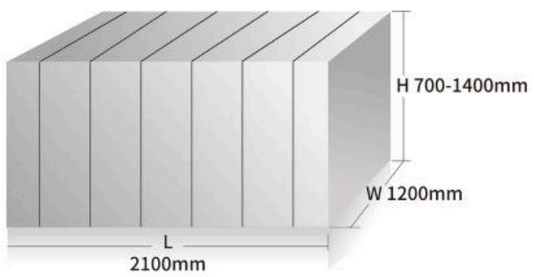



参数 Specifications

型号 Model	XTY-1200LF15379	XTY-1200LF210120
压力 Pressure	120tons	120tons
功率 Power	15kW	22kW
压缩腔尺寸 Baling Chamber Size(L×W×H)	1530×790×1800mm	2100×1200×2100mm
包块尺寸 (L×W×H, H可调) Bale size(L×W×H, H is adjustable)	1530×790×(500-1200)mm	2100×1200×(700-1400)mm
包块尺寸 Bale size (L×W×H)After expansion	1600×850×1200mm	2200×1300×1400mm
冷却方式 Cooling System	Air cooler/Water cooler	Air cooler/Water cooler
包块重量 Bale Weight	1ton	1.9tons
机器重量 Machine Weight	7tons	12tons
机器外观尺寸 Machine Size(L×W×H)	3734×1098×3700mm	4231×1510×4300mm

机器特点

- 液压驱动开关门，确保操作安全，开关门更方便
- 特有的压盘设计，在材料放置不平整的情况下，通过双缸不同频率的打压来保护压盘不受损
- 整个系统手动控制，容易操作，确保了耐用性
- 伸缩式防弹钩预防轮胎的反弹
- 采用台湾液压系统
- 主要采用施耐德电器元件
- 采用日本A.M.C.油管接头，确保不漏油
- 全自动挂链出包，更易操作，确保更高效率
- 前后开门，更容易捆扎和出包





Features

- Hydraulic-driven opening door ensures operational safety and easier opening& closing
- Two split platens with movable links to protect the platen from being distorted when pressing uneven materials like rubber tire etc
- Whole system manual control to make sure durability and simple operation
- Retractable retainer claws prevent the compacted bales to rebound
- Employ whole set Taiwan hydraulic system
- Mainly use Schneider electric components
- Employ Japanese A.M.C. oil pipe joint makes sure no oil leakage
- Auto chain bale ejector for easy operation and greater efficiency (the bale can be automatically ejected out by the lifting chains)
- Front & Back opening doors for convenient strapping and bale ejecting

纤维/金属打包机
Fiber/Metal Balers


机器应用

专门用于椰子纤维，油棕纤维，薄铁皮，铝合金，铜线等产品的压缩打包。


Usage

Specially used for compressing all kinds of waste like palm fiber,coir fiber ,thin iron sheet, aluminum alloy, copper wire etc.

Diagram (Model XTY-1500LF12080)

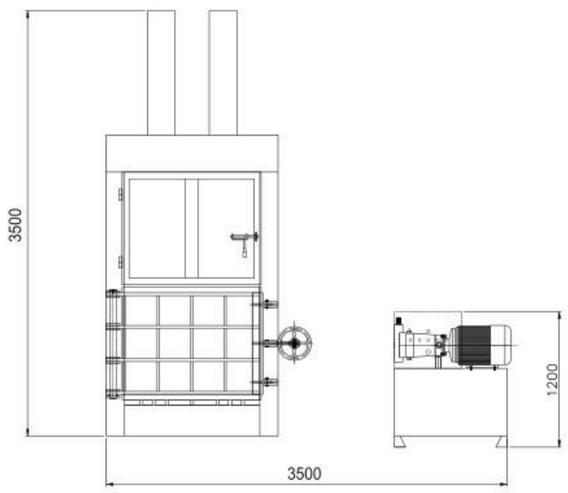

Bale Size (Model XTY-1500LF12080)

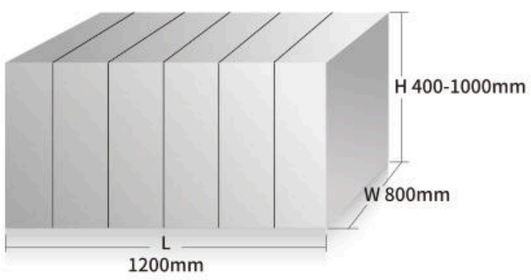



参数 Specifications

型号 Model	XTY-1500LF12080	XTY-2000LF12080
压力 Pressure	150tons	200tons
功率 Power	18.5kW/22kW	22kW/30kW
压缩腔高度 Baling Chamber Height	1500mm	1500mm
包块尺寸(L×W×H, H可调) Bale size(L×W×H, H is adjustable)	1200×800×(400-1000)mm	1200×800×(400-1000)mm
加料口尺寸 Feeding Opening Size	1200×500mm	1200×500mm
包块重量(纤维/金属) Bale Weight(Fiber/Metal)	100-250kgs/450-550kgs	150-300kgs/500-600kgs
机器重量 Machine Weight	6500kgs	7500kgs
机器外观尺寸 Machine Overall Dimension	3500×1300×3500mm	3600×1400×3600mm

机器特点

- 自动挂链出包，提高了工作效率
- 前后开门，方便捆包出包
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命



Features

- Automatic chain bale ejector for quickly and easily ejecting the bales out from the machine
- Front and back opening doors designs, conveniently for strapping
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation .
- Equipped with independent emergency stop for safe operation
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump

套袋机
Baling and Bagging Machines

机器应用


专门用于刨花，苜蓿草等生物垫料，以及布料，废旧棉纱，纤维等边角料的压缩套袋，广泛用于实验室，宠物店材料加工，二手服装回收等。

Usage


Specialized designed for baling and bagging wood shaving/chips, alfalfa, waste fabric, cotton yarn and textile scraps etc. Widely used by laboratories, the pets bedding materials plants, clothes recycling plants etc.



Diagram (Model XTB-250)

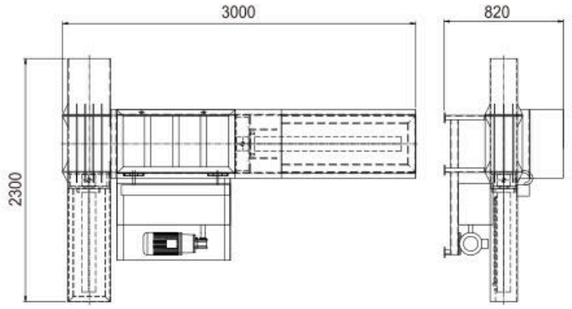

Bale Size (Model XTB-250)

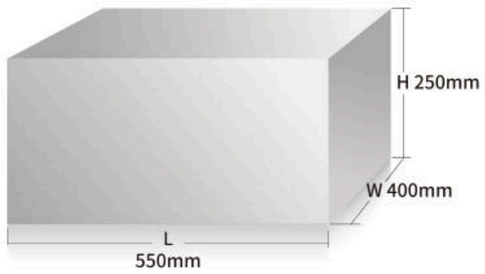

参数 Specifications

机器类型 Machine Type	手动投料套袋机 Manual Feeding Baling and Bagging Machine				自动套袋机 Automatic Baling and Bagging Machine
型号 Model	XTB-100	XTB-200	XTB-250	XTB-300	XTB-400
加料口尺寸(L×H) Feed Opening Size(L×H)	500×300mm	850×550mm	1000×550mm	1200×600mm	1000×650mm
包块尺寸 (L×W×H) Bale size(L×W×H)	300×90×200mm	550×380×200mm	550×400×250mm	600×450×250mm	650×300×400mm
包块重量 Bale weight	1kg(sawdust)	20kgs(fabric)	25kgs(fabric)	30kgs(fabric)	40-50kgs
功率 Power	5.5kW	7.5kW	7.5kW	11kW	11kW
机器重量 Machine Weight	850kgs	1000kgs	1100kgs	1200kgs	3000kgs
机器外观尺寸 Machine Overall Dimension	1600×1300×1500mm	2600×2200×1500mm	3000×2300×1500mm	3500×2500×1500mm	3300×3600×2000mm

机器特点

- 自带称重装置，确保每个包块的重量一致(只针对手动投料套袋机)
- 一键式操作，方便快捷
- 一次加料完成，提高工作效率
- 日本欧姆龙PLC控制，安全联锁，质量更可靠



Features

- Equipped with weighing device, ensures uniform bale weight(only for Manual feeding bagging machine)
- Only one press button required for the whole pressing and ejecting system, for conveniently operation
- One time material feeding, improves the working efficiency
- Equipped with Omron brand of PLC,makes sure safety interlock







除尘系统
Dust Collecting System

机器应用

专门应用于瓦楞纸箱厂、印刷厂废纸输送压缩打包系统的粉尘收集与压块，使废气排放达到环保要求，真正帮助客户实现智能化、无尘化车间。

还可以根据安监要求，加装一系列防爆装置，如：隔爆阀，无焰泄爆片等，做到完全符合国家环保安监的要求。



Usage

Specially used for collecting and baling dust in waste disposal system for corrugated carton and printing industries, so that the exhaust gas emission can meet the environmental requirements and help customers to achieve intelligent, dust-free workshop.

A series of explosion-proof devices can also be installed according to the safety supervision requirements,such as:Explosion Isolation Valve, Flameless Explosion Venting Plate,etc. so as to fully meet the requirements of the national environmental protection safety supervision.




脉冲除尘器
Pulse Dust Collector



灰尘打饼机
Dust Baler



无焰泄爆
Flameless Explosion Venting Plate



隔爆阀
Explosion Isolation Valve

参数 Specifications

除尘器型号 Dust Collector Model	XTF-10000	XTF-20000	XTF-30000	XTF-40000	XTF-50000
处理风量 Air Volume	10000m³/h	20000m³/h	30000m³/h	40000m³/h	50000m³/h
过滤面积 Filtering area	67㎡	133㎡	200㎡	267㎡	333㎡
过滤风速 Filtering Speed	2.5m/min				
除尘风机功率 Dust Blower Power	15kW	22kW	30kW	45kW	55kW
控制方式 Control Mode	变频器控制VFD Control				
滤袋材料 Filter Bag Material	三防抗静电覆PTFE膜易清灰涤纶布袋 Easy-cleaning polyester cloth bag with triple anti-static coated PTFE film				
除尘效率 Dust Collection Efficiency	99.99%				
脉冲气流压力 Pulse Airflow Pressure	0.4MPa-0.6MPa				
压缩空气耗气量 Compressed Air Consumption	200L/min				
排放浓度 Outside Dust Concentration	≤20 mg/ m³				

湿式除尘 Wet Dust Collector

机器应用

湿式除尘（wet dust collector）也叫文丘里湿式除尘（Venturi wet dust collector），主要通过进口的文丘里管（Venturi tube）将水和粉尘充分混合，将粉尘与空气分离。湿式除尘会产生污水，一般造纸行业会使用湿式除尘。



Usage

Wet dust collector is also called Venturi wet dust collector. Its working principle is to fully mix water and dust through imported Venturi tube to separate dust from air.Wet dust collector will generate sewage. Generally, it is used in the paper industry.

纸板破碎机/二合一纸板纸管破碎机

Cardboard Shredder/Cardboard & Paper Core Shredder

机器应用

专门用于纸板和纸管的破碎。

Usage


Specially used for shredding cardboard or paper core/tube.





XTP-15

Diagram (Model XPS-1450)

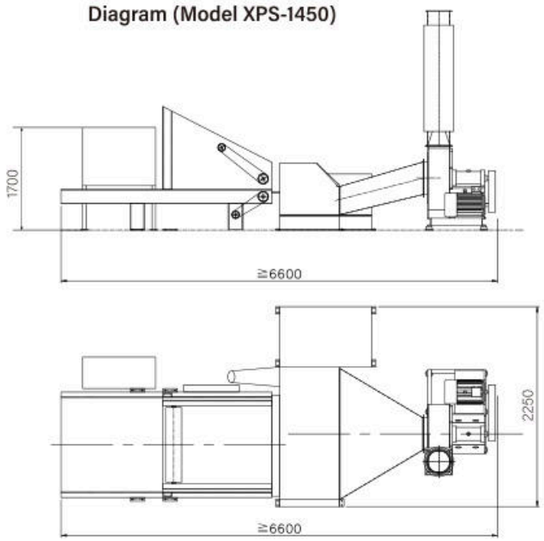



XTPR-800S

参数 Specifications

型号 Model	XPS-1450	XPS-1500E	XTP-15	XTPR-800S
最大入料纸板宽度 Max.Cardboard Feeding Width	1450mm	1500mm	1480mm	不可破碎纸板(Not available)
最大入料纸管厚度 Max. Core Thickness	不可破碎纸管(Not available)		10mm	20mm
最大入料纸管直径 Max. Core Diameter	不可破碎纸管(Not available)		120mm	180mm
破碎电机功率 Shredding Motor Power	22kW	18.5kW	15kW	22kW
风机功率 Shredding Blower Power	18.5kW(选配 Optional)		15kW(选配 Optional)	18.5kW(选配 Optional)
处理量 Capacity	1-2tons/h	1-2tons/h	1-2tons/h	1-2tons/h
机器重量 Machine Weight	3000kgs	2500kgs	3000kgs	1500kgs
机器外观尺寸 Machine Size	6000×2250×1700mm	3500×2200×1900mm	3700×2300×1900mm	1850×1500×1300mm


机器特点

- 采用高强度输送机送料
- 采用大扭力齿轮减速机
- 采用安全设计，严格保护操作者安全
- 安全设计符合欧洲标准
- 采用德国技术
- 特殊菱形刀设计，专门用于破碎纸管

Features

- Equipped with high strength conveyor for feeding
- Equipped with gear reducer of strong torque force
- Adopt safety design to protect the operators
- Adopt European standard safety design
- Adopt German technology
- Diamond shape blade design, specially used for shredding paper core

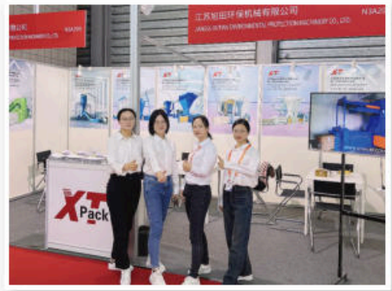



江苏旭田环保机械有限公司



XTPACK BALERS


江苏旭田环保机械有限公司

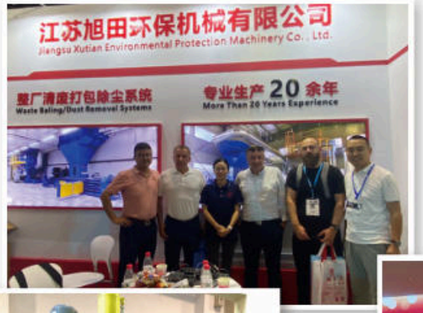


江苏旭田环保机械有限公司
Jiangsu Xutian Environmental Protection Machinery Co., Ltd.
整厂清库打包除尘系统
Waste Baling/Dust Removal Systems
专业生产 20 余年
More Than 20 Years Experience

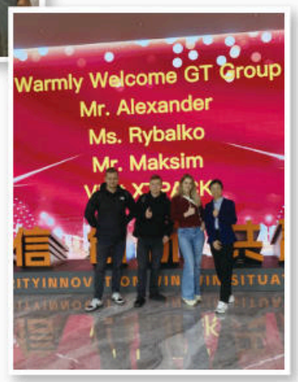


Warmly Welcome GT Group
Mr. Alexander
Ms. Rybalko
Mr. Maksim


回收再生科技专区
Recycling
Technology Zone
NK15
江苏旭田环保机械有限公司
XTPACK BALING PRESS


Warmly Welcome
Mr Narendra,Mr Hemant and Ms Julia





Warmly welcome
Mr. Lynn
Mr. Clayton






XTPACK

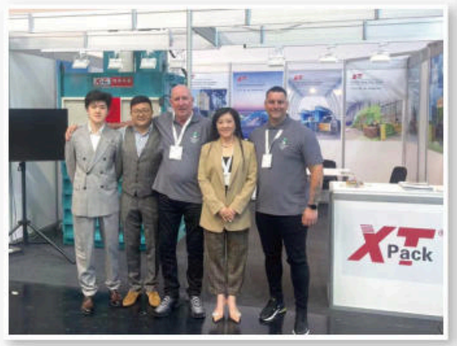





配套辅助设备系列
Baler Accessories



纸箱撕碎机
Carton Shredder



分拣输送带
Sorting Conveyor



皮带输送机
Belt Conveyor



破碎机
Shredder



圆桶式分离器
Drum-Style Cyclone



板式分离器
Plate Separator



碎纸风机
Shredding Fan



脉冲除尘器
Pulse Dust Collector



旋转分离器
Rotary Separator



布袋除尘器
Bag Dust Collector



打散器
Scatter



铁板链输送机
Iron Conveyor


配套辅助设备系列
Baler Accessories



垃圾箱打包机
Bin Baler




倒料机
Bin Lifter



瓶子刺破机
Bottle Perforator



管道
Pipes



气动打包机
Pneumatic Strapping Machine



PET 打包带
PET Strap




PET/PP 带带盘车
PET/PP Strapping Dispensor



捆扎绳
Straps



铁丝
Iron Wire



定尺钢丝
Quick-Lock Galvanized Steel Wires



预压装置
Pre-Compreessing Device



散纸油缸
Anti-Jam Cylinder