新罗兰
FOLDING
GLUING
MACHINERY

Rolam®

THE LEADER OF FOLDING GLUING MACHINERY

新罗兰 糊盒行业的领跑者

浙江新罗兰机械有限公司
ZHEJIANG NEW LUOLAN MACHINERY CO.,LTD.
浙江罗兰智能科技有限公司
ZHEJIANG ROLAM INTELLIGENT TECHNOLOGY CO.,LTD.

Rolam®

地址：浙江省温州市平阳县海西镇新阳路19-23号
Add: No. 19-23, Xinyang Road, Haixi Town, Pingyang, Zhejiang, China
电话：0577-80339888　　传真：0577-80339886
Tel: 0086-577-80339888　Fax: 0086-577-80339886
E-mail: ragaoke@163.com

www.newluolan.com
www.ragkjx.com
www.foldinggluing.com

NEW LUOLAN MACHINERY 2026

ENTERPRISE PROFILE

企业简介



Rolam浙江新罗兰机械有限公司

专注研发、制造、销售服务为一体的国家高新技术企业，专为折叠纸盒瓦楞纸箱和彩印包装行业提供优质的生产设备。为广大客户提供高质量，高效益，快捷方便的包装解决方案。

秉承“七星为罗，益质如兰”的公司理念，遵循产业发展方向，始终坚定“致力全球领先，打造民族品牌”的信念，通过浙江制造品质团体标准，集中呈现：精心设计，精良选材，精工制造，精准服务，引进公司5s化管理，专注工业智能化系统，注重产品智能化生产，为客户提供真正竞争优势的糊盒设备。

Zhejiang New LuoLan Machinery Co.,Ltd.

A national high-tech enterprise integrating R&D, manufacturing, and sales services, dedicated to providing high-quality production equipment for the folding paper box, corrugated box, and color printing packaging industries. We offer high-quality, high-efficiency, and convenient packaging solutions to our customers.

ROLAM adheres to the direction of industrial development and has always been committed to the belief of "striving to be a global leader and building a national brand." Through the Zhejiang manufacturing quality group standards, we focus on presenting: meticulous design, fine material selection, precision manufacturing, accurate service, introducing the company's 5S management, focusing on industrial intelligent systems, and emphasizing intelligent production of products, providing customers with truly competitive edge folding gluing equipment.

DEVELOPMENT HISTORY

发展历程

2011



2011年迁址工业园（面积扩大4倍）。

在全国设立销售/售后办事处。同年8月，跨境电商引入，取得CE认证，且获得多项专利认证。

MOVING TO INDUSTRIAL PARK IN 2011 (AREA EXPANDED 4 TIMES).
AND SALES/AFTER-SALES OFFICES SETTLED NATIONWIDE, CROSS-BORDER E-COMMERCE WAS INTRODUCED, CE CERTIFICATION WAS OBTAINED, AND SEVERAL PATENTS WERE CERTIFIED IN AUGUST OF THE SAME YEAR.

2008



一条轴线，高科机械跃然眼前，第一台设备落户，第一份责任扛起，2008年，高科机械坐落瑞安。

THE FIRST EQUIPMENT SETTLED, THE FIRST RESPONSIBILITY TO CARRY, IN 2008 GAOKE MACHINERY IS LOCATED IN RUIAN.

2015



时间沉淀，技术革新。2015年瑞安高科改名浙江新罗兰，迁址平阳万全工业园，采用现代化企业管理模式，新组织架构生产。完成蜕变，迎来雄鹰时代。

IN 2015, RUIAN GAOKE CHANGED ITS NAME TO BE ZHEJIANG NEW LUOLAN AND MOVED TO PINGYANG WANQUAN INDUSTRIAL PARK.
WE ADOPTED THE MODERN ENTERPRISE MANAGEMENT WAY AND A NEW ORGANIZATIONAL STRUCTURE FOR PRODUCTION.

2017



“好口碑”是新罗兰生存的基础。作为国家高新技术企业，发明专利及实用新型专利高达30多项， 2017年糊盒糊箱设备更是通过国家印刷机械质量监督检验中心检测。

GOOD FAITH IS THE BASIS FOR THE SURVIVAL OF NEW LUOLAN.
AS A NATIONAL HIGH-TECH ENTERPRISE, WE HAVE MORE THAN 30 PATENTS FOR INVENTIONS AND UTILITY MODELS. OUR FOLDER GLUER EQUIPMENT PASSED THE INSPECTION OF THE NATIONAL QUALITY SUPERVISION AND INSPECTION CENTER IN 2017.

2019



新罗兰首台无勾智能设备彰显糊盒魅力--落户国外，象征中国糊盒行业迎来打破传统时代。追踪-落实-反馈-总结，这是我们的服务，IS9000质量认证的颁定，更是我们质量的佐证。

ROLAM FIRST HOOKLESS CLIMBING TYPE INTELLIGENTMACHINE SETTLED ABROAD SYMBOLIZES THEERA OF BREAKING TRADITION IN CHINA'SGLUING INDUSTRY. TRACKING-IMPLEMENTATION-FEEDBACK-SUMMARY, THIS IS OUR SERVICE. THE AWARDING OF ISO 9000 QUALITY CERTIFICATION IS THE CORROBORATION OF OUR QUALITY.

2021



浙江新罗兰机械有限公司作为起草单位制定《浙江制造糊盒机团体标准》。

2021年正式搬入自建厂房，规模扩大整整4倍。

ZHEJIANG NEW LUOLAN MACHINERY CO., LTD. AS THE DRAFTING UNIT TO DEVELOP THE “MADE IN ZHEJIANG FOLDER GLUER MACHINE GROUP STANDARD”, OFFICIALLY MOVED INTO THE SELF-BUILT FACTORY IN 2021, EXPANDING THE SCALE BY A FULL FOUR TIMES.

2022



2022年，加工中心纷至沓来，公司强化自主研发团队，5S目视化管理体系，ERP软件全面覆盖。T/ZZB 2882-2022全自动高速粘盒机团体标准签订，同时获得温州市装备制造业重点领域首台(套)。

IN 2022 WE OWN OUR PROCESSING CENTER, WE STRENGTHEN THE RESEARCH AND DEVELOPMENT TEAM,5S VISUAL MANAGEMENT SYSTEM AND ERP SOFTWARE COMPREHENSIVE COVERAGE.
THE GROUP STANDARD T/ZZB2882-2022 FOR FULLY AUTOMATIC HIGH SPEED FOLDER GLUER WAS FORMULATED. WE OBTAINED THE FIRST SET OF EQUIPMENT IN THE KEY AREA OF MANUFACTURING INDUSTRIAL IN WENZHOU.

FUTURE...

PROFESSIONAL

SINCE 2008

世界品质 浙江制造

Zhejiang Makes It Happen



糊盒机行业标准制定者
Setter of Folder Gluer Industry

自研自产标准件
Self-developed & processed standard parts

工厂5S管理
Factory 5S Management

ISO：9001 认证标准
ISO:9001 Certified






客户服务/技术支持
Service&Support

We Look Forward To Further Cooperation With You

期待与您的合作



技术储备
Technical Reserves



技术服务
Techical Services



深度检查和维护
Inspection & Maintenance



培 训
Training



备件与耗材
Spare Parts



SOLUTION STARTS HERE

查看您的解决方案

Each model optional with Auto Set-Up

每一系列，选配一键换单

Our Machines Are All Over The World, that's what makes us special


我们的设备遍布全球，这就是新罗兰的魅力所在

PERFECTFOLD

Intelligent Folder Gluer


智能记忆糊盒机

650-XL-P/800-XL-P/1100-XL-P

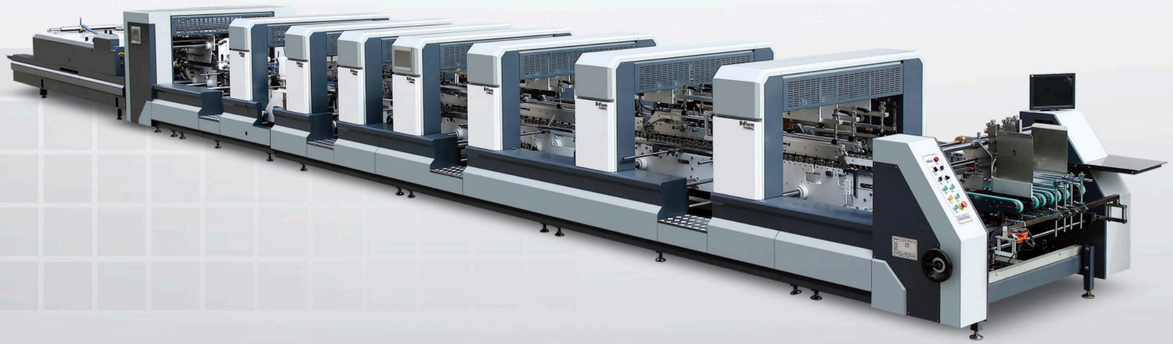

地基图 FOUNDATION DRAWING

* 图片仅供参考（实际以地基图为准）



产品简介

XL-P系列智能记忆糊盒机融合了先进的设计技术，集中体现在精准快速换单、多功能的工作平台配置，以满足各种包装糊盒生产要求，提高制盒效率和精度。采用上传动控制系统，设计通用模块，包括针对纸盒喇叭口、超线、离线等纠正功能，165°左右预折。

XL-P系列智能记忆糊盒机，工程师首次调试存储参数，可以重复使用，智能化设备是首选产品，它能够生产单边、侧边、勾底盒型四角及六角盒型。

BRIEF INTRODUCTION

The XL-P series intelligent memory folder gluer machine combinient advanced design technology, focus on precise and rapid order changeovers and a multi-functional work platform configuration to meet various packaging gluing production requirements, improving box-making efficiency and precision. It adopts an upper driving system with a universal module design, including correction functions for cardboard box fish-tail, over-line, and under-line corrections, and a 165° prefolding.

The XL-P series intelligent memory folder gluer machine allows engineers to initially debug and store parameters for repeated use. As an intelligent equipment, it is a preferred product, capable of producing straight line,lock bottom, 4/6 corner boxes.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	650	800	1100
纸张材料	Paper material	卡纸Cardboard 210-800gsm，E/F瓦楞 E/F Flute		
最大速度	Max.Speed	400m/min		
折叠箱厚度	Max.thickness of folded box	12mm		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	650mm	800mm	1100mm
长×宽×高	Length×Width×Height	20×1.6×1.75m	20×1.8×1.75m	20×2.1×1.75m
重量	Net Weight	10T	11T	12T
整机功率	Total power	35kw	38kw	40kw

注:数据如有更改，恕不另行通知。（Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	70-800	70-800	70-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540




勾底盒型 Crash lock bottom Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	100-800	100-800	100-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	650Type	800Type	1100Type
A	160-650	160-800	160-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	650Type	800Type	1100Type
A	250-650	250-800	270-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



PERFECTFOLD

Intelligent Folder Gluer


智能记忆糊盒机

650-XL-S/800-XL-S/1100-XL-S



地基图 FOUNDATION DRAWING

* 图片仅供参考（实际以地基图为准）

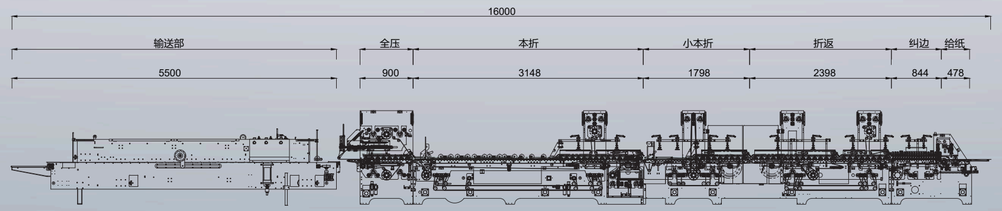

产品简介

XL-S系列经不断研发、迭代，体现在精准快速换单、多功能的配置，其中包括90°转角、左右拐带预折、本折自动升降、分离式胶盒等功能。整机加长型沟底部、加长本折部，可生产直线盒、盒中盒、锁底盒 、四六角等盒型 。

XL-S系列是集自动化、功能全面一体的糊盒机，一键调机功能可以实现5分钟完成自动走板定位，为纸盒制造商创造竞争优势。

BRIEF INTRODUCTION

The XL-S Series through continuous RD and iteration, features precise and rapid order changeovers and multifunctional configurations, including 90° degree turning, left and right pre-folding, automatic lifting of the folding section, and separate glue tank design. The machine features an extended bottom groove and folding section, enabling the production of straight line boxes, box-in-boxes, lock-bottom boxes, and 4/6 corner boxes.

The XL-S series is a fully automated, multifunctional gluing machine. Its one-key adjustment function allows for automatic board positioning within 5 minutes, creating a competitive advantage for cardboard box manufacturers.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	650	800	1100
纸张材料	Paper material	卡纸Cardboard 210-800gsm，E/F瓦楞 E/F Flute		
最大速度	Max.Speed	400m/min		
折叠箱厚度	Max.thickness of folded box	12mm		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	650mm	800mm	1100mm
长×宽×高	Length×Width×Height	15.2×1.6×1.6m	16×1.8×1.6m	16×2.1×1.6m
重量	Net Weight	7.0T	8.0T	9.0T
整机功率	Total power	48kw	50kw	50kw

注:数据如有更改，恕不另行通知。（Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	70-800	70-800	70-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540




勾底盒型 Crash lock bottom Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	100-800	100-800	100-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	650Type	800Type	1100Type
A	160-650	160-800	160-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	650Type	800Type	1100Type
A	250-650	250-800	270-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



BRAVOFOLD


Automatic Folder Gluer

全自动高速糊盒机

650-LC-S/800-LC-S/1100-LC-S



地基图 FOUNDATION DRAWING

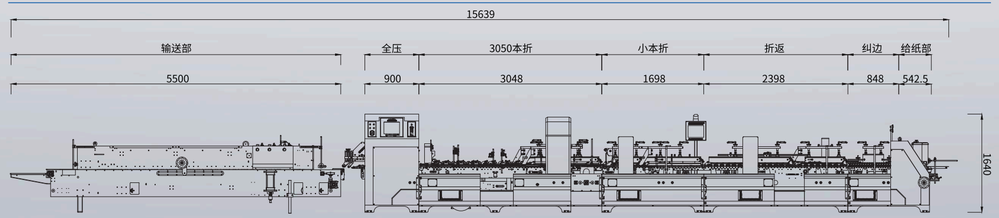

产品简介

LC-S系列经不断研发、迭代，体现在精准快速换单、多功能的配置，其中包括90°转角、左右拐带预折、本折自动升降等功能。整机加长型勾底部、加长本折部，可生产直线盒、盒中盒、锁底盒 、四六角等盒型 。

LC-S系列是集智能化、功能全面一体的糊盒机，为纸盒制造商创造竞争优势。

BRIEF INTRODUCTION

The LC-S Series has been continuously developed and iterated, showcasing precise and quick switching of orders with multifunctional configurations. This includes features such as a 90° turning angle, pre-folding for left and right bends, and automatic raising and lowering of the final folding section. The machine has an extended lock bottom section and final folding section, allowing it to produce various box types, including straight line boxes, internal folding boxes, lock-bottom boxes, and 4/6 corners boxes.

The LC-S Series is an intelligent and fully functional folder gluer machine, creating a competitive advantage for boxes manufacturers.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	650	800	1100
纸张材料	Paper material	卡纸Cardboard 210-800gsm，E/F瓦楞 E/F Flute		
最大速度	Max.Speed	400m/min		
折叠箱厚度	Max.thickness of folded box	12mm		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	650mm	800mm	1100mm
长×宽×高	Length×Width×Height	15.0×1.5×2.2m	15.7×1.7×2.43m	15.7×2.0×2.73m
重量	Net Weight	7.0T	7.5T	8.0T
整机功率	Total power	30kw	32kw	32kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	70-800	70-800	70-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540




勾底盒型 Crash lock bottom Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	100-800	100-800	100-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	650Type	800Type	1100Type
A	160-650	160-800	160-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	650Type	800Type	1100Type
A	250-650	250-800	270-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



BRAVODETECT


Folder Gluer with Inspection Function

高速检测糊盒机

650-LC-C/800-LC-C/1100-LC-C



地基图 FOUNDATION DRAWING



产品简介

LC-C系列经不断研发、迭代，体现在精准快速换单、多功能的配置，其中包括90°转角、左右拐带预折、本折自动升降等功能。整机加长型沟底部、加长本折部，可 生产直线盒、锁底盒 、四六角等盒型 。

LC-C系列检测界面简洁、操作简单，有实时图像监控,有实时数据统计，有缺陷显示区等功能，能有效直观观察产品的质量状况。

BRIEF INTRODUCTION

The LC-C series Folder Gluer after continuous research and development and iteration, is reflected in the precise and fast order change and multi-function configuration, which includes 90° turning, left and right pre-folding, and pneumatic lifting of the final folding section.

The LC-C series folder gluer with Simplified interface, real-time image monitoring, data statistics and can visually see the defective part of carton on the display which ensure the machine is easier to operate and working with high efficiency.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	650	800	1100
纸张材料	Paper material	卡纸Cardboard 210-800gsm		
最大速度	Max.Speed	400m/min（检测时速度最大是300米）		
折叠箱厚度	Max.thickness of folded box	12mm		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	650mm	800mm	1100mm
长×宽×高	Length×Width×Height	20×2.2×1.67m	20×2.3×1.67m	20×2.6×1.67m
重量	Net Weight	8.0T	10.0T	12.0T
整机功率	Total power	30kw	35kw	35kw

注:数据如有更改，恕不另行通知。（Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	70-800	70-800	70-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540




勾底盒型 Crash lock bottom Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	100-800	100-800	100-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	650Type	800Type	1100Type
A	160-650	160-800	160-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	650Type	800Type	1100Type
A	250-650	250-800	270-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100



FLEXFOLD


Automatic Four Six Corners Folder Gluer

全自动四六角糊盒机

650-GS/800-GS/1100-GS



地基图 FOUNDATION DRAWING

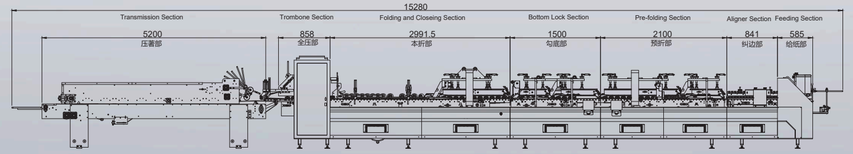

产品简介

GS系列全自动四六角糊盒机适用于生产直线盒、锁底盒、双边贴盒、四六角盒等。GS系列全自动高速糊盒机的优势集中体现在精准快速换单、多功能的工作平台配置，以满足市场上小批量到大中批量的包装糊盒生产要求。整机活件保存并可随意调取，配置新型多功能通用模块，主传动采用多楔带传动，运转平稳传动精确。给纸采用独立电机驱动，可方便准确调节给纸速度，调节纸盒密度，各部导板采用电动摇杆，可生产直线盒，锁底盒，四六角等盒型。针对疑难复杂盒型，为工作人员提供无限创意空间和操作可能。新罗兰始终致力于为客户提供高性价比、全面高效的糊盒方案，以此满足和回报当今包装市场日益增长的高标准。

BRIEF INTRODUCTION

The GS series automatic folder gluer is suitable for straight-line, crash-lock bottom, double wal, 4&6-cornerboxesWith the most advanced concepts and technologies of New Luolan Machinery, it can run from small tolarge size boxes with accuracy in fast job change to meet to the demand of wide range of packagingcompanies, commercial printers and finishers. Driven by ribbed V belt, which is more steady and accurateFeeding part with motor control, which improves machine adjusting speed. We offer our best solutions folcomplicated boxes by creative ideas to make the operation and adjustment easier. New Luolan Machineryhas been committed to offer the industry an affordable, cost effective and complete state of the art solutionfor the folding and gluing needs of today's converter and market demands.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	650	800	1100
纸张材料	Paper material	卡纸Cardboard 210-800gsm，E/F瓦楞 E/F Flute		
最大速度	Max.Speed	400m/min		
折叠箱厚度	Max.thickness of folded box	12mm		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	650mm	800mm	1100mm
长×宽×高	Length×Width×Height	15.2×1.3×1.45m	15.2×1.5×1.45m	15.2×1.9×1.45m
重量	Net Weight	4.5T	5T	5.5T
整机功率	Total power	19.5kw	19.5kw	19.5kw

注:数据如有更改，恕不另行通知。（Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	70-800	70-800	70-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540




勾底盒型 Crash lock bottom Box

型号 Model	650Type	800Type	1100Type
A	140-650	160-800	220-1100
B	100-800	100-800	100-800
C(Min)	70	70	70
D	10-20	10-20	10-20
E	65-320	75-390	105-540
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	650Type	800Type	1100Type
A	160-650	160-800	160-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100




六角盒型 6 Corners Box

型号 Model	650Type	800Type	1100Type
A	250-650	250-800	270-1100
B	130-800	130-800	130-800
H	30-100	30-100	30-100




盒样成型工艺流程 BOX FORMING PROCEDURES


STRAIGHT LINE PREFOLDING
直线预折盒型




CRASH LOCK BOTTOM BOX
勾底盒型




FOUR CORNERS BOX
四角盒型




BOX WITH INTERNAL FOLD
盒中盒



SIX CORNERS BOX
六角盒型



罗兰智能 Rolam Intelligent | 瓦楞系列 For Corrugated Cartons

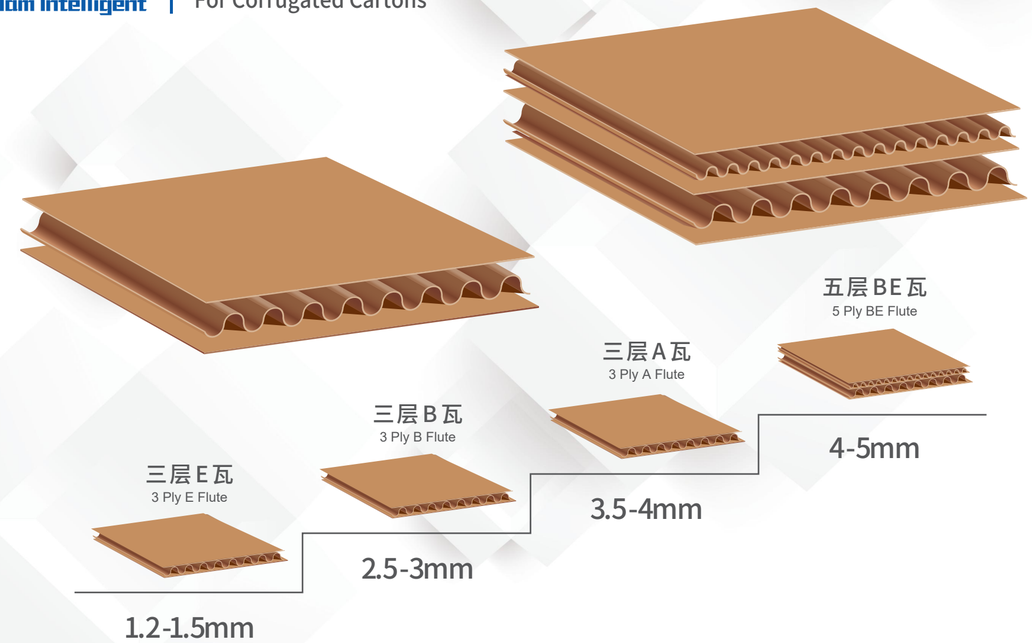

TWINFOLD


Advanced Double Feeder Two-Piece Folder Gluer

全自动双拼糊箱机

1650-SP/2000-SP/2400-SP



地基图 FOUNDATION DRAWING

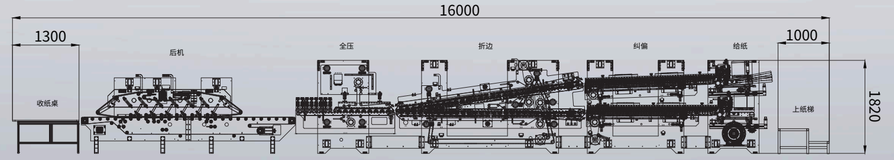


产品简介

SP系列全自动双拼糊箱机采用上下吸式飞达出纸结构，解决传统左右拼皮带摩擦造成覆亚膜表面刮花的行业痛点。整机采用分组设计原理，每一段均有踏板平台操作，方便操作人员进入设备内部进行操作，增加前挡追速结构，提高拼接准确度，采用伺服折边结构，提高效率且可折叠糊口25mm以上纸箱，满足瓦楞包装市场日益增长的高标准。

BRIEF INTRODUCTION

The SP series fully automatic double-joint gluer adopts an up-and-down section feeder paper delivery structure to solve the industry pain point of scratches on the surface of the sub-film caused by friction between the traditional left and right joint belts. The whole machine adopts a grouping design principle, and each section has a pedal platform operation, which is convenient for operators to enter the equipment for operation. The front gear speed tracking structure is added to improve the splicing accuracy. The servo folding structure is adopted to improve efficiency and can fold and glue cartons with a size of more than 25mm, meeting the growing high standards of the corrugated packaging market.

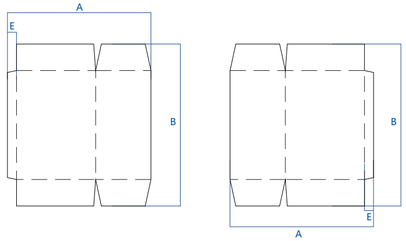

普通盒型 Straight Line Box

型号 Model	1650Type	2000Type	2400Type
A	500-1650	500-2000	500-2400
B	400-1200	400-1200	400-1200
E	35-50	35-50	35-50

技术参数 TECHNICAL PARAMETERS

型号	MODEL	1650	2000	2400
适用的瓦楞纸箱	Applicable corrugated boxes	三层、五层纸箱、A.B.C.E.AB.BC.EB.EE	Three-layer and five-layer cartons, A.B.C.E.AB.BC.EB.EE	
进纸长度	Feeding length	300mm-1700mm	300mm-1700mm	300mm-1700mm
进纸宽度	Feeding width	500mm-1650mm	500mm-2000mm	500mm-2400mm
给纸方式	Paper feeding method	自动连续给纸 Automatic continuous paper feeding		
最大速度	Max speed	160m/min		
点动速度	Jog speed	20m/min		
电源电压	Supply voltage	3P 380V 50HZ		
长×宽×高	Length×Width×Height	16x2.76x1.85m	16x3.06x1.85m	16x3.46x1.85m
重量	Net Weight	22T	23.5T	26T
整机功率	Total power	55kw	55kw	55kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)

MAJORFOLD PRO


Heavy Duty Folder Gluer

重型瓦楞糊箱机

1700-QH/2100-QH/2500-QH



地基图 FOUNDATION DRAWING



产品简介

QH系列整机各部位采用伺服电机控制，直线导轨功能，相较于传统主电机设备运行更加平稳顺畅。QH预折部增加二次压痕功能，纠正瓦楞盒自身存在的压痕线、不达标的现象，增加糊口压平功能，增加胶水粘合性，加强大型瓦楞出纸平整。

QH系列全自动重型瓦楞糊箱机适用于做四六角、勾底、单边瓦楞纸盒折盒成型。

BRIEF INTRODUCTION

The QH series machine components servo motor control and linear guide rails in each parts, resulting in smoother and more stable operation compared to traditional main motor machines. The QH pre-folding section adds a secondary creasing function to correct existing creasing lines and substandard defects in corrugated boxes. It also features a gluing and flattening function to enhance glue adhesion and improve the flatness of large corrugated paper output.

The QH series fully automatic heavy-duty corrugated box folder gluer machine is suitable for folding and forming 4/6 corner, lock bottom, and single line Corrugated boxes.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	1700	2100	2500
纸张材料	Paper material	卡纸Cardboard 210-800gsm，A/B/E瓦楞 A/B/E Flute		
最大速度	Max. speed	280m/min		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	1700mm	2100mm	2500mm
长×宽×高	Length×Width×Height	24x2.9x2.05m	24x3.3x2.05m	24x3.7x2.05m
重量	Net Weight	14.5T	15.5T	18T
整机功率	Total power	60kw	60kw	60kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	1700Type	2100Type	2500Type
A	520-1700	520-2100	520-2500
B	300-1600	300-1600	300-1600
C	300-1400	300-1400	300-1400
D	10-35	10-35	10-35
E	250-850	250-1050	250-1250




勾底盒型 Crash lock bottom Box

型号 Model	1700Type	2100Type	2500Type
A	500-1600	500-2000	500-2400
B	340-1600	340-1600	340-1600
C	300-1400	300-1400	300-1400
D	10-35	10-35	10-35
E	250-850	250-1050	250-1250
H	30-100	30-100	30-100




四角盒型 4 Corners Box

型号 Model	1700Type	2100Type	2500Type
A	340-1600	340-2000	340-2400
B	380-1600	380-1600	380-1600
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	1700Type	2100Type	2500Type
A	500-1600	500-2000	500-2400
B	380-1600	380-1600	380-1600
H	30-100	30-100	30-100



MAJORFOLD


Heavy Duty Folder Gluer

重型瓦楞糊箱机

1200-QHZ-S/1450-QHZ-S/1700-QHZ-S



地基图 FOUNDATION DRAWING

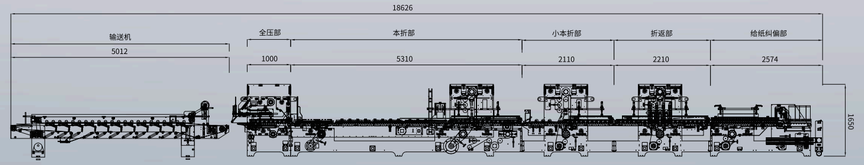

产品简介

QHZ-S系列整机采用多契带传动，相较于传统主电机设备运行更加平稳顺畅。QHZ-S系列预折部增加二次压痕功能，纠正瓦楞盒自身存在的压痕线、不达标的现象，本折配备挤压功能，拐带配备伺服，使瓦楞盒完美成型。
QHZ-S系列全自动重型瓦楞糊箱机适用于做四六角、勾底、单边瓦楞纸盒折盒成型。

BRIEF INTRODUCTION

The QHZ-S series machine adopts a V-shape belt drive, which makes the operation smoother and more stable compared to traditional main motor equipment. The QHZ-S series pre-folding section adds a secondary creasing function to correct existing creasing lines and substandard phenomena on the corrugated box itself. The folding section is equipped with a compression function, and the folding belt is equipped with a servo motor, ensuring perfect corrugated box forming.
The QHZ-S series fully automatic heavy-duty corrugated box gluing machine is suitable for folding and forming 4/6 corner, lock bottom and straight line corrugated cardboard boxes.


技术参数 TECHNICAL PARAMETERS

型号	MODEL	1200	1450	1700
纸张材料	Paper material	卡纸Cardboard 210-800gsm，A/B/E瓦楞 A/B/E Flute		
最大速度	Max. speed	280m/min		
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°		
电源电压	Power supply	3P 380V 50HZ		
最大出纸宽度	Blank width	1200mm	1450mm	1700mm
长×宽×高	Length×Width×Height	18.6x3.0x1.65m	18.6x3.2x1.65m	18.6x3.5x1.65m
重量	Net Weight	12.5T	13.5T	14T
整机功率	Total power	36kw	36kw	36kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	1200Type	1450Type	1700Type
A	340-1200	360-1450	360-1700
B	80-1000	80-1000	80-1000
C	80-1000	80-1000	80-1000
D	10-35	10-35	10-35
E	170	180	180




勾底盒型 Crash lock bottom Box

型号 Model	1200Type	1450Type	1700Type
A	340-1200	360-1450	360-1700
B	80-1000	80-1000	80-1000
C	80-1000	80-1000	80-1000
D	10-35	10-35	10-35
E	170	180	180
H	35	35	35




四角盒型 4 Corners Box

型号 Model	1200Type	1450Type	1700Type
A	230-1200	240-1450	240-1700
B	80-600	80-600	80-600
H	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	1200Type	1450Type	1700Type
A	370-1100	390-1350	390-1700
B	80-600	80-600	80-600
H	30-100	30-100	30-100



SOLIDFOLD


Four Six Corners Corrugated Carton Folder Gluer

分组式四六角糊箱机

1200-PCS-S/1450-PCS-S/1600-PCS-S/1800-PCS-S




地基图 FOUNDATION DRAWING

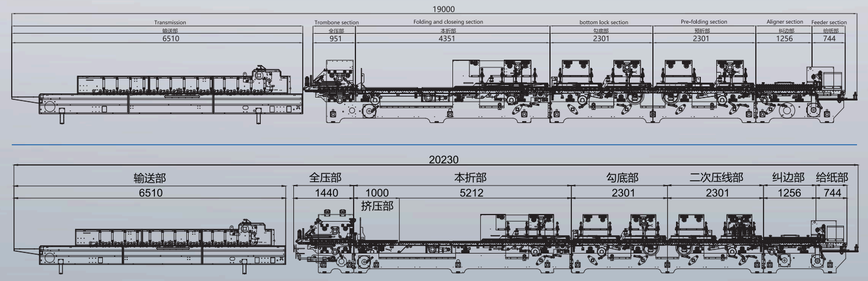


二次压线挤压地基图

PCS-H



▲ 二次压线
Scoring



▲ 挤压
Squeezing


技术参数 TECHNICAL PARAMETERS

型号	MODEL	1200	1450	1600	1800
纸张材料	Paper material	卡纸Cardboard 210-800gsm，A/B/E瓦楞 A/B/E Flute			
最大速度	Max. speed	280m/min			
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°			
电源电压	Power supply	3P 380V 50HZ			
最大出纸宽度	Blank width	1200mm	1450mm	1600mm	1800mm
长×宽×高	Length×Width×Height	19x1.96x1.6m	19x2.26x1.6m	19x2.4x1.8m	19x2.6x1.8m
长×宽×高(挤压)(SQUEEZING)		20x1.96x1.6m	20x2.26x1.6m	20x2.4x1.8m	20x2.6x1.8m
重量	Net Weight	10.5T	11.5T	12.5T	13.0T
重量(挤压)(SQUEEZING)		11.5T	12.5T	13.5T	14.0T
整机功率	Total power	32kw	32kw	32kw	38kw
整机功率(挤压)(SQUEEZING)		36kw	36kw	36kw	42kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)


普通盒型 Straight Line Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	290-1200	370-1450	370-1600	370-1800
B	100-900	100-900	100-900	100-900
C(Min)	100	100	100	100
D	10-30	10-30	10-30	10-30
E	140-600	175-725	175-800	175-900




勾底盒型 Crash lock bottom Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	290-1200	370-1450	370-1600	370-1800
B	100-900	100-900	100-900	100-900
C(Min)	100	100	100	100
D	10-30	10-30	10-30	10-30
E	140-600	175-725	175-800	175-900




四角盒型 4 Corners Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	160-1200	160-1450	160-1600	160-1800
B	160-900	160-900	160-900	160-900
H	30-100	30-100	30-100	30-100



六角盒型 6 Corners Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	320-1200	360-1450	360-1600	360-1800
B	160-900	160-900	160-900	160-900
H	30-100	30-100	30-100	30-100



SOLIDFOLD


Crash Lock Bottom Corrugated Boxes Folder Gluer

预勾糊箱机

1200-PCS-Y/1450-PCS-Y/1600-PCS-Y/1800-PCS-Y



地基图 FOUNDATION DRAWING

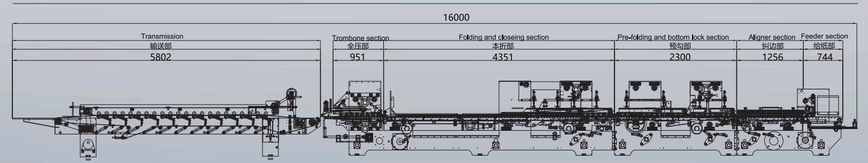

产品简介

分组式PCS-Y系列糊箱机，轨道式运行、性能稳定、操作性强，本机针对单边、勾底包装纸盒纸箱，迎合各包装行业需求。

特点：整机采用强力电机控制，PLC变频器控制系统，三轨道装置，本折采用伺服电机控制，整机可增配各功能模块。


BRIEF INTRODUCTION

The PCS-Y series folding gluing machine adopts three-rack operation, stable performance and strong operability. This machine is designed for straight-line ans crash lock bottom boxes to meet the needs of various packaging industries.

Features: The whole machine adopts powerful motor control, PLC inverter control system, three-track device, folding section with servo motors control which ensure PCS running stably and operate conveniently. The machine can add and reduce functions according to different requirements.


普通盒型 Straight Line Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	290-1200	370-1450	370-1600	370-1800
B	100-900	100-900	100-900	100-900
C(Min)	100	100	100	100
D	10-30	10-30	10-30	10-30
E	140-600	175-725	175-800	175-900



勾底盒型 Crash lock bottom Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	290-1200	370-1450	370-1600	370-1800
B	100-900	100-900	100-900	100-900
C(Min)	100	100	100	100
D	10-30	10-30	10-30	10-30
E	140-600	175-725	175-800	175-900



技术参数 TECHNICAL PARAMETERS

型号	MODEL	1200	1450	1600	1800
纸张材料	Paper material	卡纸Cardboard 210-800gsm，A/B/E瓦楞 A/B/E Flute			
最大速度	Max. speed	280m/min			
折盒方式	Way of folding	第一折与第三折为180°与135°，第二折与第四折为180° Fold 1 and fold 3 are 180°and 135°,fold 2 and fold 4 are 180°			
电源电压	Power supply	3P 380V 50HZ			
最大出纸宽度	Blank width	1200mm	1450mm	1600mm	1800mm
长×宽×高	Length×Width×Height	16x1.96x1.6m	16x2.26x1.6m	16x2.4x1.8m	17x2.6x1.8m
重量	Net Weight	9.5T	10.5T	11.5T	12.0T
整机功率	Total power	22kw	22kw	25kw	25kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)

SOLIDFOLD


Corrugated Carton Folder Gluer

糊箱机

1200-PCS/1450-PCS/1600-PCS/1800-PCS



地基图 FOUNDATION DRAWING

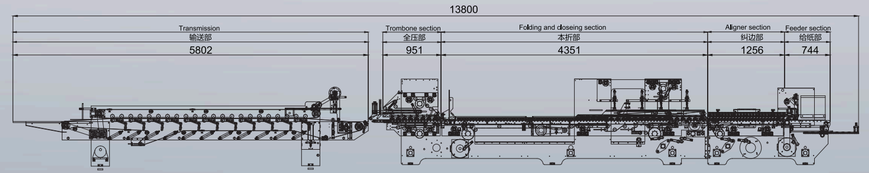

产品简介

分组式PCS糊箱机，轨道式运行、性能稳定、操作性强，本机针对单边包装纸盒纸箱，迎合各包装行业需求。特点：整机采用强力电机控制，PLC变频器控制系统，三轨道装置，本折采用伺服电机控制，整机可增配各功能模块。


BRIEF INTRODUCTION

The PCS series folder gluer machine adopt the three-rack operation, stable performance and strong operability. This machine is designed for straight line cartons and boxes to meet the needs of various packaging industries.

Features: The whole machine adopts powerful motor control, PLC inverter control system, three-track device, folding section with servo motors control which ensure PCS running stably and operate conveniently. And the whole machine can be opetional equipped with various functional modules.

普通盒型 Straight Line Box

型号 Model	1200Type	1450Type	1600Type	1800Type
A	290-1200	370-1450	370-1600	370-1800
B	100-900	100-900	100-900	100-900
C(Min)	100	100	100	100
D	10-30	10-30	10-30	10-30
E	140-600	175-725	175-800	175-900



技术参数 TECHNICAL PARAMETERS

型号	MODEL	1200	1450	1600	1800
纸张材料	Paper material	卡纸Cardboard 210-800gsm，A/B/E瓦楞 A/B/E Flute			
最大速度	Max. speed	280m/min			
折盒方式	Way of folding	第二折与第四折为180° Fold 2 and fold 4 are 180°			
电源电压	Power supply	3P 380V 50HZ			
最大出纸宽度	Blank width	1200mm	1450mm	1600mm	1800mm
长×宽×高	Length×Width×Height	13.8x1.96x1.6m	13.8x2.26x1.6m	13.8x2.4x1.8m	14.5x2.6x1.8m
重量	Net Weight	8.0T	9.0T	10.0T	10.5T
整机功率	Total power	20kw	20kw	20kw	20kw

注:数据如有更改，恕不另行通知。 (Notes:Data are subject to change without prior notice)

相关配件
Related Accessories





S-450 Heavy-Duty Handy Pack
重型收盒机


主要技术参数 MAIN TECHNICAL PARAMETERS

型号	Model	S-450
最大尺寸	The biggest size box	450x450mm
机器尺寸	Machine dimension	3.6x1.85x1.3m
重量	Weight	730KG
电压	Voltage	220V/50Hz
功率	Power	2.2kw

注:数据如有更改，恕不另行通知。（Notes:Data are subject to change without prior notice）

AUTOFEEDER Automatic Box Loader
全自动上纸机

PREFEEDER Automatic Box Feeder
预堆上料机

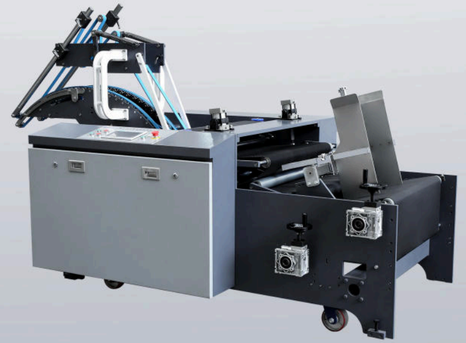



喷胶机 Spraying System

采用冷胶系统，标准配备三支喷枪，便于在生产四六角盒及各种异型盒时准确快速施胶。

Equipped with three guns, convenient in the production of 4/6 corner box and various special-shaped box, gluing quickly and accurately sizing.



等离子处理器 Plasma Processor

通过表面涂层处理，提高表面附着能力，使盒子上胶更加容易。

Through surface coating treatment, to strengthen the adherence and make cartons easier to be glued.

Our Clients...
我们的客户...

CTP packaging · KAVA · CANPAC · 花园集团 HUAYUAN GROUP
金龙股份 · WEN_XIANG 潍坊文祥印务有限公司 · QP Group 雋思集團 · TC printing one source
Smurfit Kappa · LEO PAPER GROUP 鹤山雅图仕印刷有限公司 利奥纸品印刷集团成员 · 福森集团 · 艺隆包装 YILONG PACKAGING · 劲佳包装

注:排版呈现，不分先后。（Notes:Sorting is typographical, not ordered.）

Our Partners...
我们的合作方...

hhs Baumer Group · Rexroth Bosch Group · NSK · Schneider Electric · BAOSTEEL
SIEMENS · KEYENCE · YASKAWA · TECO
EATON Powering Business Worldwide · WEINVIEW · Invention & Innovation NITTA · habasit